

10/31/00
JCS23 U.S. PTO

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860
www.sughrue.com

JCS23 U.S. PTO
09/699433
00/13/01

October 31, 2000

J. Frank Osha, Esq.
Direct Dial (202) 663-7915
Email: fosh@osha.sughrue.com

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Atsushi MURASHIMA
SPEECH SIGNAL DECODING METHOD AND APPARATUS, SPEECH SIGNAL
ENCODING/DECODING METHOD AND APPARATUS, AND PROGRAM
PRODUCT THEREFOR
Our Ref. Q61542

Dear Sir:

Attached hereto is the application identified above including 81 sheets of the specification and claims, 9 sheets of formal drawings, the executed Assignment and PTO 1595 form, and the executed Declaration and Power of Attorney. Also enclosed is an Information Disclosure Statement with Form PTO-1449 and references.

The Government filing fee is calculated as follows:

Total claims	46	-	20	=	26	x	\$18.00	=	\$468.00
Independent claims	10	-	3	=	7	x	\$80.00	=	\$560.00
Base Fee									\$710.00

TOTAL FILING FEE	\$1738.00
Recordation of Assignment	\$40.00
TOTAL FEE	\$1778.00

Checks for the statutory filing fee of \$1738.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from November 1, 1999 based on Japanese Application No. 311620/99. The priority document is enclosed herewith.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By:

J. Frank Osha

Registration No. 24,625

SPEECH SIGNAL DECODING METHOD AND APPARATUS,
SPEECH SIGNAL ENCODING/DECODING METHOD AND APPARATUS,
AND PROGRAM PRODUCT THEREFOR

FIELD OF THE INVENTION

5 This invention relates to a method of encoding and decoding
a speech signal at a low bit rate. More particularly, the
invention relates to a speech signal decoding method and
apparatus, a speech signal encoding/decoding method and
apparatus and a program product for improving the quality of
10 sound in noise segments.

BACKGROUND OF THE INVENTION

15 A method of encoding a speech signal by separating the
speech signal into a linear prediction filter and its driving
excitation signal (excitation signal, excitation vector) is
used widely as a method of encoding a speech signal efficiently
at medium to low bit rates. One such method that is typical is
CELP (Code-Excited Linear Prediction). With CELP, a linear
prediction filter for which linear prediction coefficients
representing the frequency characteristic of input speech have
20 been set is driven by an excitation signal (excitation vector)
represented by the sum of a pitch signal (pitch vector), which
represents the pitch period of speech, and a sound source signal
(sound source vector) comprising a random number or a pulse train,
whereby there is obtained a synthesized speech signal
25 (reconstructed signal, reconstructed vector). At this time the

pitch signal and the sound source signal are multiplied by respective gains (pitch gain and sound source gain). For a discussion of CELP, see the paper (referred to as "Reference 1") "Code excited linear prediction: High quality speech at very low bit rates" by M. Schroeder et. al (Proc. of IEEE Int. Conf. on Acoust., Speech and Signal Processing, pp. 937 - 940, 1985).

Mobile communication such as by cellular telephone requires good quality in a noisy environment typified by the congestion of busy streets and by the interior of a traveling automobile. A problem with CELP-based speech encoding is a marked decline in sound quality for speech on which noise has been superimposed (such speech will be referred to as "background-noise speech" below).

A method of smoothing the gain of a sound source in a decoder is an example of a known technique for improving the encoded speech quality of background-noise speech. In accordance with this method, a temporal change in short-term average power of a sound source signal that has been multiplied by the aforesaid sound source gain is smoothed by smoothing the sound source gain. As a result, a temporal change in short-term average power of the excitation signal also is smoothed. This method improves sound quality by reducing extreme fluctuation in short-term average power in decoded noise, which is one cause of degraded sound quality.

With regard to a method of smoothing the gain of a sound

source signal, see Section 6.1 of "Digital Cellular Telecommunication System; Adaptive Multi-Rate Speech Transcoding" (ETSI Technical Report, GSM 06.90 version 2.0.0) (Referred to as "Reference 2").

Fig. 8 is a block diagram illustrating an example of the structure of a conventional speech signal decoder which improves the encoded quality of background-noise speech by smoothing the gain of a sound source signal. It is assumed here that input of a bit sequence occurs in a period (frame) of T_{fr} msec (e.g., 20 ms) and that computation of a reconstructed vector is performed in a period (subframe) of T_{fr}/N_{sfr} msec (e.g., 5 ms), where N_{sfr} is an integer (e.g., 4). Let frame length be L_{fr} samples (e.g., 320 samples) and let subframe length be L_{sfr} samples (e.g., 80 samples). The numbers of these samples is decided by the sampling frequency (e.g., 16 kHz) of the input speech signal.

The components of the conventional speech signal decoder will be described with reference to Fig. 8.

The code of the bit sequence enters from an input terminal 10. A code input circuit 1010 splits the code of the bit sequence that has entered from the input terminal 10 and converts it to indices that correspond to a plurality of decode parameters. An index corresponding to a line spectrum pair (LSP) which represents the frequency characteristic of the input signal is output to an LSP decoding circuit 1020, an index corresponding

to a delay L_{pd} that represents the pitch period of the input signal is output to a pitch signal decoding circuit 1210, an index corresponding to a sound source vector comprising a random number or a pulse train is output to sound source signal decoding circuit 1110, an index corresponding to a first gain is output to a first gain decoding circuit 1220, and an index corresponding to a second gain is output to a second gain decoding circuit 1120.

The LSP decoding circuit 1020 has a table (not shown) in which multiple sets of LSPs have been stored. The LSP decoding circuit 1020 receives as an input the index that is output from the code input circuit 1010, reads the LSP that corresponds to this index out of the table and obtains $LSP \hat{q}_j^{(N_{sfr})}(n)$ in the N_{sfr} th subframe of the present frame (the n th frame), where N_p represents the degree of linear prediction.

The LSP of an $(N_{sfr}-1)$ th subframe from the first subframe is obtained by linearly interpolating $\hat{q}_j^{(N_{sfr})}(n)$ and $S_{sfr}(i)$ (where $i=0, \dots, L_{sfr}$).

$LSP \hat{q}_j^{(N_{sfr})}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) is output to a linear prediction coefficient conversion circuit 1030 and to a smoothing coefficient calculation circuit 1310.

The linear prediction coefficient conversion circuit 1030 receives as an input a signal output from the $LSP \hat{q}_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) decoding circuit 1020.

The linear prediction coefficient conversion circuit 1030 converts the entered $LSP \hat{q}_j^{(n)}(n)$ to a linear prediction

coefficient $\hat{\alpha}_{j, (m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{s, tr}$) and outputs $\hat{\alpha}_{j, (m)}(n)$ to a synthesis filter 1040. A known method such as the one described in Section 5.2.4 of Reference 2 is used to convert the LSP to a linear prediction coefficient.

5 The sound source signal decoding circuit 1110 has a table (not shown) in which a plurality of sound source vectors have been stored. The sound source signal decoding circuit 1110 receives as an input the index that is output from the code input circuit 1010, reads the sound source vector that corresponds to this index out of the table and outputs this vector to a second gain circuit 1130.

10 The second gain decoding circuit 1120 has a table (not shown) in which a plurality of gains have been stored. The second gain decoding circuit 1120 receives as an input the index that is output from the code input circuit 1010, reads a second gain that corresponds to this index out of the table and outputs this gain to a smoothing circuit 1320.

15 The second gain circuit 1130, which receives as inputs the first sound source vector output from the sound source signal decoding circuit 1110 and the second gain output from the smoothing circuit 1320, multiplies the first sound source vector by the second gain to generate a second sound source vector and outputs the second sound source vector to an adder 1050.

20 A memory circuit 1240 holds an excitation vector input thereto from the adder 1050. The memory circuit 1240, which

holds the excitation vector applied to it in the past, outputs the vector to a pitch signal decoding circuit 1210.

The pitch signal decoding circuit 1210 receives as inputs the past excitation vector held by the memory circuit 1240 and the index output from the code input circuit 1010. The index specifies a delay L_{pd} . In regard to this past excitation vector, the pitch signal decoding circuit 1210 cuts vectors of L_{sfr} samples corresponding to the vector length from a point L_{pd} samples previous to the starting point of the present frame and generates a first pitch signal (vector). In case of $\hat{\alpha}_j^{(m)}(n)$, the pitch signal decoding circuit 1210 cuts out vectors of L_{pd} samples, repeatedly connects the L_{pd} samples and generates a first pitch vector, which is a sample of vector length L_{sfr} . The pitch signal decoding circuit 1210 outputs the first pitch vector to a first gain circuit 1230.

The first gain decoding circuit 1220 has a table (not shown) in which a plurality of gains have been stored. The first gain decoding circuit 1220 receives as an input the index that is output from the code input circuit 1010, reads a first gain that corresponds to this index out of the table and outputs this gain to the first gain circuit 1230.

The first gain circuit 1230, which receives as inputs the first pitch vector output from the pitch signal decoding circuit 1210 and the first gain output from the first gain decoding circuit 1220, multiplies the entered first pitch vector by the

first gain to generate a second pitch vector and outputs the generated second pitch vector to the adder 1050.

The adder 1050, to which the second pitch vector output from the first gain circuit 1230 and the second sound source vector output from the second gain circuit 1130 are input, adds these inputs and outputs the sum to the synthesis filter 1040 as an excitation vector.

The smoothing coefficient calculation circuit 1310, to which LSP $\hat{q}_j^{(m)}(n)$ output from the LSP decoding circuit 1020 is input, calculates an average LSP $\bar{q}_{0j}(n)$ in the n th frame in accordance with Equation (1) below.

$$\hat{q}_{0j}(n) = 0.84 \cdot \bar{q}_{0j}(n-1) + 0.16 \cdot \hat{q}_{0j}^{(N_{fs})}(n) \quad \dots(1)$$

Next, with respect to each subframe m , the smoothing coefficient calculation circuit 1310 calculates the amount of fluctuation $d_0(m)$ of the LSP in accordance with Equation (2) below.

$$d_0(m) = \sum_{j=1}^{N_0} \frac{|\bar{q}_{0j}(n) - \hat{q}_j^{(m)}(n)|}{\bar{q}_{0j}(n)} \quad \dots(2)$$

A smoothing coefficient $k_0(m)$ in the subframe m is calculated in accordance with Equation (3) below.

$k_0(m) = \min(0.25, \max(0, d_0(m) - 0.4)) / 0.25 \quad \dots(3)$
 where $\min(x, y)$ is a function in which the smaller of x and y is taken as the value and $\max(x, y)$ is a function in which the larger of x and y is taken as the value. The smoothing coefficient calculation circuit 1310 finally outputs the smoothing

coefficient $k_0(m)$ to the smoothing circuit 1320.

The smoothing coefficient $\hat{g}_0(m)$ output from the smoothing coefficient calculation circuit 1310 and the second gain output from the second gain decoding circuit 1120 are input to the
5 smoothing circuit 1320. The latter then calculates an average gain $\bar{g}_0(m)$ in accordance with Equation (4) below from second gain $\hat{g}_0(m)$ in subframe m .

$$\bar{g}_0(m) = \frac{1}{5} \sum_{i=0}^4 \hat{g}_0(m-i) \quad \dots(4)$$

Next, second gain $\hat{g}_0(m)$ is substituted in accordance with
10 Equation (5) below.

$$\hat{g}_0(m) = \hat{g}_0 \cdot k_0(m) + \bar{g}_0(m) \cdot (1 - k_0(m)) \quad \dots(5)$$

Finally the smoothing circuit 1320 outputs the second gain $\hat{g}_0(m)$ to the second gain circuit 1130.

The excitation vector output from the adder 1050 and the
15 linear prediction coefficient $\hat{\alpha}_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) output from the linear prediction coefficient conversion circuit 1030 are input to the synthesis filter 1040. The latter drives a synthesis filter $1/A(z)$, for which the linear prediction coefficients have been set, by the excitation vector
20 to thereby calculate the reconstructed vector, which is output from an output terminal 20. The transfer function $1/A(z)$ of the synthesis filter is represented by Equation (6) below, where it is assumed that the linear prediction coefficient is represented by α_i ($i=1, \dots, N_p$).

$$1/A(z) = 1/(1 - \sum_{i=1}^{N_A} \alpha_i z^i) \quad \dots(6)$$

Fig. 9 is a block diagram illustrating the structure of a speech signal encoder in a conventional speech signal encoding/decoding apparatus. The speech signal encoder will be described with reference to Fig. 9. It should be noted that the first gain circuit 1230, the second gain circuit 1130, the adder 1050 and the memory circuit 1240 are the same as those described in connection with the speech signal decoding apparatus shown in Fig. 8 and need not be described again.

The encoder has an input terminal 30 to which an input signal (input vector) is applied, the input vector being generated by sampling a speech signal and combining a plurality of samples into one vector as one frame.

The input vector from the input terminal 30 is applied to a linear prediction coefficient calculation circuit 5510, which proceeds to subject the input vector to linear prediction analysis and obtain linear prediction coefficients. A known method of performing linear prediction analysis is described in Chapter 8 "Linear Predictive Coding of Speech" in L. R. Rabiner et. al "Digital Processing of Speech Signals" (Prentice-Hall, 1978) (referred to as "Reference 3").

The linear prediction coefficient calculation circuit 5510 outputs the linear prediction coefficients to an LSP conversion/quantization circuit 5520.

Upon receiving the linear prediction coefficients output from the linear prediction coefficient calculation circuit 5510, the LSP conversion/quantization circuit 5520 converts the linear prediction coefficients to an LSP and quantizes the LSP to obtain a quantized LSP. An example of a well-known method of converting linear prediction coefficients to an LSP is that described in Section 5.2.3 of Reference 2. An example of a method of quantizing an LSP is that described in Section 5.2.5 of Reference 2.

As described in connection with the LSP decoding circuit of Fig. 8, the quantized LSP is assumed to be a quantized LSP $\hat{q}_j^{(N_{sfr})}(n)$ in the N_{sfr} th subframe of the present frame (the n th frame) (where $j=1, \dots, N_p$).

The quantized LSP of an $(N_{sfr}-1)$ th subframe from the first subframe is obtained by linearly interpolating $\hat{q}_j^{(N_{sfr})}(n)$ and $S_{sfr}(i)$ (where $j=1, \dots, L_{sf}$). Furthermore, this LSP is assumed to be LSP $q_j^{(N_{sfr})}(n)$ ($j=1, \dots, N_p$) in the N_{sfr} th subframe of the present frame (the n th frame). The LSP of the $(N_{sfr}-1)$ th subframe from the first subframe is obtained by linearly interpolating $q_j^{(N_{sfr})}(n)$ and $q_j^{(N_{sfr})}(n-1)$.

The LSP conversion/quantization circuit 5520 outputs LSP $q_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) and the quantized LSP $\hat{q}_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) to a linear prediction coefficient conversion circuit 5030 and outputs an index corresponding to the quantized LSP $\hat{q}_j^{(N_{sfr})}(n)$ (where $j=1,$

..., N_p) to a code output circuit 6010.

The LSP $q_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) and the quantized LSP $\hat{q}_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$) output from the LSP conversion/quantization circuit 5520 are input to the linear prediction coefficient conversion circuit 5030, which proceeds to convert $q_j^{(m)}(n)$ to a linear prediction (LP) coefficient $\alpha_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$), convert $\alpha_j^{(m)}(n)$ to a linear prediction coefficient $\hat{\alpha}_j^{(m)}(n)$ (where $j=1, \dots, N_p, m=1, \dots, N_{sfr}$), output the linear prediction coefficient $\alpha_j^{(m)}(n)$ to a weighting filter 5050 and to a weighting synthesis filter 5040, and output the linear prediction coefficient $\hat{\alpha}_j^{(m)}(n)$ to the weighting synthesis filter 5040.

An example of a well-known method of converting an LSP to linear prediction (LP) coefficients and converting a quantized LSP to quantized linear prediction coefficients is that described in Section 5.2.4 of Reference 2.

The input vector from the input terminal 30 and the linear prediction coefficients from the linear prediction coefficient conversion circuit 5030 are input to the weighting filter 5050.

The latter uses these linear prediction coefficients to produce a weighting filter $W(z)$ corresponding to the characteristic of the human sense of hearing and drives this weighting filter by the input vector, whereby there is obtained a weighted input vector. The weighted input vector is output to subtractor 5060.

The transfer function $W(z)$ of the weighting filter is

represented by Equation (7) below.

$$W(z) = Q(z/r_1) / Q(z/r_2) \quad \cdots (7)$$

where the following holds.

$$\begin{aligned} Q(z/r_1) &= 1 - \sum_{i=1}^{N_0} \alpha_i^{(m)} r_1^i z^i \\ Q(z/r_2) &= 1 - \sum_{i=1}^{N_0} \alpha_i^{(m)} r_2^i z^i \end{aligned} \quad \cdot \cdot \cdot (8)$$

- 5 Here r_1 and r_2 represent constants, e.g., $r_1 = 0.9$, $r_2 = 0.6$. Refer to Reference 1, etc., for the details of the weighting filter.

The excitation vector output from the adder 1050 and the linear prediction coefficient $\alpha_{j, (m)}(n)$ (where $j=1, \dots, N_p$, $m=1, \dots, N_{s+r}$) and the linear prediction coefficient $\hat{\alpha}_{j, (m)}(n)$ (where $j=1, \dots, N_p$, $m=1, \dots, N_{s+r}$) output from the linear prediction coefficient conversion circuit 5030 are input to the weighting synthesis filter 5040.

15 The weighting synthesis filter 5040 drives the weighting synthesis filter for which $\alpha_{j, (m)}(n)$, $\hat{\alpha}_{j, (m)}(n)$ have been set, namely

$$H(z)W(z) = Q(z/r_1) / [A(z)Q(z/r_2)] \quad \cdots (9)$$

by the above-mentioned excitation vector, whereby a weighted reconstructed vector is obtained.

20 The transfer function $H(z) = 1/A(z)$ of the synthesis filter is represented by Equation (10) below.

$$1/A(z) = 1 / (1 - \sum_{i=1}^{N_0} \hat{\alpha}_i^{(m)} z^i) \quad \cdot \cdot \cdot (10)$$

The weighted input vector output from the weighting filter

5050 and the weighted reconstructed vector output from the weighting synthesis filter 5040 are input to the subtractor 5060. The latter calculates the difference between these vectors and outputs the difference to a minimizing circuit 5070 as a difference vector.

The minimizing circuit 5070 successively outputs indices corresponding to all sound source vectors that have been stored in a sound source signal generating circuit 5110 to the sound source signal generating circuit 5110, successively outputs indices corresponding to all delays L_{od} within a range stipulated in a pitch signal generating circuit 5210 to the pitch signal generating circuit 5210, successively outputs indices corresponding to all first gains that have been stored in a first gain generating circuit 6220 to the first gain generating circuit 6220, and successively outputs indices corresponding to all second gains that have been stored in a second gain generating circuit 6120 to the second gain generating circuit 6120.

Further, difference vectors output from the subtractor 5060 successively enter the minimizing circuit 5070. The latter calculates the norms of these vectors, selects a sound source vector, a delay L_{od} , a first gain and a second gain that will minimize the norms and outputs indices corresponding to these to the code output circuit 6010. The indices output from the minimizing circuit 5070 successively enter the pitch signal

generating circuit 5210, the sound source signal generating circuit 5110, the first gain generating circuit 6220 and the second gain generating circuit 6120.

With the exception of wiring (connections) relating to input and output, the pitch signal generating circuit 5210, the sound source signal generating circuit 5110, the first gain generating circuit 6220 and the second gain generating circuit 6120 are identical with the pitch signal decoding circuit 1210, the sound source signal decoding circuit 1110, the first gain decoding circuit 1220 and the second gain decoding circuit 1120 shown in Fig. 8. Accordingly, these circuits need not be explained again.

The index corresponding to the quantized LSP output from the LSP conversion/quantization circuit 5520 is input to the code output circuit 6010, and so are the indices, which are output from the minimizing circuit 5070, corresponding to the sound source vector, the delay L_{pd} , the first gain and the second gain. The code output circuit 6010 converts these indices to the code of a bit sequence and outputs the code from an output terminal 40.

SUMMARY OF THE DISCLOSURE

In the course of eager investigations toward the present invention, various problems have been encountered.

A problem with the conventional coder and decoder described above is that there are instances where an abnormal sound is

produced in noise segments when the sound source gain (the second gain) is smoothed. This is because the sound source gain smoothed in the noise segments may take on a value that is much larger than the sound source gain before smoothing.

5 The reason for this is that since there are cases where the sound source gain is smoothed even in a speech segment, it so happens that when a sound source gain obtained in the past is used to temporally smooth the first-mentioned sound source gain in a noise segment, the influence of a gain having a large value
10 that corresponds to a past speech segment becomes a factor.

Accordingly, an object of the present invention in one aspect thereof is to provide an apparatus and method, and a program product as well as a medium on which the related program has been recorded, through which it is possible to avoid the
15 occurrence of abnormal sound in noise segments, such sound being caused when, in the smoothing of sound source gain (the second gain), the sound source gain smoothed in a noise segment takes on a value much larger than that of the sound source gain before smoothing.

20 According to a first aspect of the present invention, there is provided a speech signal decoding method according to claim 1. The speech signal decoding method for decoding information concerning at least a sound source signal, gain and linear prediction coefficients from a received signal, generating an
25 excitation signal and linear prediction coefficients from

decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprises: a first step of smoothing the gain using a past value of the gain; a second step of limiting the value of the smoothed gain based upon an amount of fluctuation calculated from the gain and the smoothed gain; and a third step of decoding the speech signal using the gain that has been smoothed and limited.

According to a second aspect of the present invention, there is provided a speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising: a first step of deriving a norm of the excitation signal at regular intervals; a second step of smoothing the norm using a past value of the norm; a third step of limiting the value of the smoothed norm based upon an amount of fluctuation calculated from the norm and the smoothed norm; a fourth step of changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited; and a fifth step of driving the filter by the excitation signal the amplitude of which has been changed.

According to a third aspect of the present invention, there is provided a speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising a first step of identifying a voiced segment and a noise segment with regard to the received signal using the decoded information; a second step of deriving a norm of the excitation signal at regular intervals in the noise segment; a third step of smoothing the norm using a past value of the norm; a fourth step of limiting the value of the smoothed norm based upon an amount of fluctuation derived from the norm and the smoothed norm; a fifth step of changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited; and a sixth step of driving the filter by the excitation signal the amplitude of which has been changed.

According to a fourth aspect of the present invention, in the first aspect of the invention the amount of fluctuation is represented by dividing an absolute value of a difference between the gain and the smoothed gain by the gain, and the value of the smoothed gain is limited in such a manner that the amount of fluctuation will not exceed a certain threshold value.

According to a fifth aspect of the present invention, in the second and third aspects of the invention the amount of fluctuation is represented by dividing an absolute value of a difference between the norm and the smoothed norm by the norm, and the value of the smoothed norm is limited in such a manner that the amount of fluctuation will not exceed a certain threshold value.

According to a sixth aspect of the present invention, in the second, third or fifth aspect of the invention the excitation signal in the intervals is divided by the norm in the intervals and the quotient is multiplied by the smoothed norm in the intervals to thereby change the amplitude of the excitation signal.

According to a seventh aspect of the present invention, in the second or third aspect of the invention switching between use of the gain and use of the smoothed gain is performed in accordance with an entered switching control signal when the speech signal is decoded.

According to an eighth aspect of the present invention, in the second, third, fifth or sixth aspect of the invention switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance with an entered switching control signal when the speech signal is decoded.

According to a ninth aspect of the present invention, there

is provided a speech signal encoding and decoding method comprising encoding an input speech signal by expressing it by an excitation signal and linear prediction coefficients, and performing decoding by the speech signal decoding method according to any one of the first to eighth aspects of the invention.

According to a tenth aspect of the present invention, there is provided a speech signal decoding apparatus for decoding information concerning at least a sound source signal, gain and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising: a smoothing circuit smoothing the gain using a past value of the gain; and a smoothing-quantity limiting circuit limiting the value of the smoothed gain using an amount of fluctuation calculated from the gain and the smoothed gain.

According to an 11th aspect of the present invention, there is provided a speech signal decoding apparatus for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal

to thereby decode a speech signal, comprising: an
excitation-signal normalizing circuit calculating a norm of the
excitation signal at regular intervals and dividing the
excitation signal by the norm; a smoothing circuit smoothing the
5 norm using a past value of the norm; a smoothing-quantity
limiting circuit limiting the value of the smoothed norm using
an amount of fluctuation calculated from the norm and the
smoothed norm; and an excitation-signal reconstruction circuit
multiplying the smoothed and limited norm by the excitation
10 signal to thereby change the amplitude of the excitation signal
in the intervals.

According to a 12th aspect of the present invention, the
foregoing object is attained by providing a speech signal
decoding apparatus for decoding information concerning an
excitation signal and linear prediction coefficients from a
received signal, generating the excitation signal and linear
15 prediction coefficients from the decoded information, and
driving a filter, which is constituted by the linear prediction
coefficients, by the excitation signal to thereby decode a
speech signal, comprising a voiced/unvoiced identification
20 circuit identifying a voiced segment and a noise segment with
regard to the received signal using the decoded information; an
excitation-signal normalizing circuit calculating (deriving) a
norm of the excitation signal at regular intervals and dividing
25 the excitation signal by the norm; a smoothing circuit for

smoothing the norm using a past value of the norm; a
smoothing-quantity limiting circuit limiting the value of the
smoothed norm using an amount of fluctuation calculated from the
norm and the smoothed norm; and an excitation-signal
5 reconstruction circuit multiplying the smoothed and limited
norm by the excitation signal to thereby change the amplitude
of the excitation signal in the intervals.

According to a 13th aspect of the present invention, in the
10th aspect of the invention the amount of fluctuation is
10 represented by dividing an absolute value of a difference
between the gain and the smoothed gain by the gain, and the value
of the smoothed gain is limited in such a manner that the amount
of fluctuation will not exceed a certain threshold value.

According to a 14th aspect of the present invention, in the
11th and 12th aspects of the invention the amount of fluctuation
15 is represented by dividing the absolute value of the difference
between the norm and the smoothed norm by the norm, and the value
of the smoothed norm is limited in such a manner that the amount
of fluctuation will not exceed a certain threshold value.

20 According to a 15th aspect of the present invention, in the
10th or 13th aspect of the invention, the apparatus comprises
a switching circuit in which switching between use of the gain
and use of the smoothed gain is performed in accordance with an
entered switching control signal when the speech signal is
25 decoded.

According to a 16th aspect of the present invention, in the 11th, 12th or 14th aspect of the invention, the apparatus comprises a switching circuit in which switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance with an entered switching control signal when the speech signal is decoded.

According to an 17th aspect of the present invention, there is provided a speech signal encoding and decoding apparatus comprising: a speech signal encoding apparatus encoding an input speech signal by expressing it by an excitation signal and linear prediction coefficients, and a speech signal decoding apparatus according to any one of the 10th to 16th aspects of the invention.

According to an 18th aspect of the present invention, there is provided a program product, or a medium on which has been recorded the program product, for implementing a speech signal decoding method for decoding information concerning at least a sound source signal, gain and linear prediction coefficients from a received signal, generating the excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, wherein the program causes a computer to execute processing which includes smoothing the gain using a past value of the gain; limiting the value of the smoothed gain

based upon an amount of fluctuation calculated from the gain and the smoothed gain; and decoding the speech signal using the gain that has been smoothed and limited.

According to an 19th aspect of the present invention, there is provided a program product for implementing a speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal. The program product causes a computer to execute processing which includes: (a) calculating a norm of an excitation signal at regular intervals and smoothing the norm using a past value of the norm; (b) limiting the value of the smoothed norm; based upon an amount of fluctuation calculated from the norm and the smoothed norm; and (c) changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited; and driving the filter by the excitation signal the amplitude of which has been changed.

According to an 20th aspect of the present invention, there is provided a program product for implementing a speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a

received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal. The program product causes a computer to execute processing which includes: (a) identifying a voiced segment and a noise segment with regard to a received signal using decoded information; (b) calculating a norm of an excitation signal at regular intervals in the noise segment and smoothing the norm using a past value of the norm; (c) limiting the value of the smoothed norm using an amount of fluctuation calculated from the norm and the smoothed norm; and (d) changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited; and driving the filter by the excitation signal the amplitude of which has been changed.

According to a 21st aspect of the present invention, in the 18th aspect of the invention there is provided a program product which includes representing the amount of fluctuation by dividing an absolute value of a difference between the gain and the smoothed gain by the gain, and limiting the value of the smoothed gain in such a manner that the amount of fluctuation will not exceed a certain threshold value.

According to a 22nd aspect of the present invention, in the 19th or 20th aspect of the invention there is provided a program product which includes representing the amount of fluctuation

by dividing the absolute value of the difference between the norm and the smoothed norm by the norm, and limiting the value of the smoothed norm in such a manner that the amount of fluctuation will not exceed a certain threshold value.

5 According to a 23rd aspect of the present invention, in the 19th, 20th or 22nd aspect of the invention there is provided a program product which includes dividing the excitation signal in the intervals by the norm in the intervals and multiplying the quotient by the smoothed norm in the intervals to thereby
10 change the amplitude of the excitation signal.

According to a 24th aspect of the present invention, in the 18th or 21st aspect of the invention there is provided a program product which includes switching between use of the gain and use the smoothed gain in accordance with an entered switching
15 control signal when the speech signal is decoded.

According to a 25th aspect of the present invention, in the 19th, 20th, 22nd and 23rd aspect of the invention there is provided a program product which includes switching between use of the excitation signal and use of the excitation signal the
20 amplitude of which has been changed in accordance with an entered switching control signal when the speech signal is decoded.

According to a 26th aspect of the present invention, there is provided a program product which includes encoding an input speech signal by expressing it by an excitation signal and linear
25 prediction coefficients, and performing decoding by the speech

signal decoding method according to any one of the first, to eighth aspects of the invention.

According to a further aspect the program product may be carried by a suitable medium which includes dynamic and/or static medium, such as a recording medium, and/or carrier wave etc.

Other aspects are disclosed in the claims 27 et seq. which are incorporated herein by reference thereto.

Other objects, features and advantages of the present invention will be apparent to those skilled in the art from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a first embodiment of the present invention;

Fig. 2 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a second embodiment of the present invention;

Fig. 3 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a third embodiment of the present invention;

Fig. 4 is a block diagram illustrating the construction of

a speech signal decoding apparatus according to a fourth embodiment of the present invention;

Fig. 5 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a fifth embodiment of the present invention;

Fig. 6 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a sixth embodiment of the present invention;

Fig. 7 is a block diagram illustrating the construction of a speech signal decoding apparatus according to an embodiment of the present invention;

Fig. 8 is a block diagram illustrating the construction of a speech signal decoding apparatus according to the prior art; and

Fig. 9 is a block diagram illustrating the construction of a speech signal encoding apparatus according to the prior art.

PREFERRED EMBODIMENTS OF THE INVENTION

Preferred modes of practicing the present invention will now be described.

In the present invention, a smoothing circuit (1320 in Fig. 1) smoothes sound source gain (second gain) in a noise segment using sound source gain obtained in the past, and a smoothing-quantity limiting circuit (7200 in Fig. 1) obtains the amount of fluctuation between the sound source gain (second gain) and the sound source gain smoothed by the smoothing circuit

(1320 in Fig. 1) and limits the value of the smoothed gain in such a manner that the amount of fluctuation will not exceed a certain threshold value. Thus, the values that can be taken on by the smoothed sound source gain are limited based upon an amount of fluctuation calculated using a difference between the smoothed sound source gain and the sound source gain in such a manner that the sound source gain smoothed in the noise segment will not take on a value that is very large in comparison with the sound source gain before smoothing. As a result, the occurrence of abnormal sound in the noise segment is avoided.

In a first preferred mode of the present invention, as shown in Fig. 1, a speech signal decoding apparatus is for decoding information concerning at least a sound source signal, gain and linear prediction (LP) coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, and the apparatus includes a smoothing circuit (1320) for smoothing the gain using a past value of the gain, and smoothing-quantity limiting circuit (7200) for limiting the value of the smoothed gain using an amount of fluctuation calculated from the gain and the smoothed gain. The smoothing-quantity limiting circuit (7200) obtains the amount of fluctuation by dividing the absolute value of the difference between sound source gain

(second gain) and the smoothed sound source gain by the sound source gain.

More specifically, the apparatus includes: a code input circuit (1010) for splitting code of the a bit sequence of an encoded input signal that enters from an input terminal, converting the code to indices that correspond to a plurality of decode parameters, outputting an index corresponding to a line spectrum pair (LSP), which represents frequency characteristic of the input signal, to an LSP decoding circuit, outputting an index corresponding to a delay that represents the pitch period of the input signal to a pitch signal decoding circuit, outputting an index corresponding to a sound source vector comprising a random number or a pulse train to a sound source signal decoding circuit, outputting an index corresponding to a first gain to a first gain decoding circuit, and outputting an index corresponding to a second gain to a second gain decoding circuit; the LSP decoding circuit (1020), to which the index output from the code input circuit (1010) is input, for reading the LSP corresponding to the input index out of a table which stores LSPs corresponding to indices, obtains an LSP in a subframe of the present frame (the nth frame), and outputs the LSP; the linear prediction coefficient conversion circuit (1030), to which the LSP output from the LSP decoding circuit is input, for converting the LSP to linear prediction coefficients and outputting the coefficients to a synthesis

filter; the sound source signal decoding circuit (1110), to which the index output from the code input circuit (1010) is input, for reading a sound source vector corresponding to the index out of a table which stores sound source vectors

5 corresponding to indices, and outputting the sound source vector to a second gain decoding circuit; the second gain decoding circuit (1120), to which the index output from the code input circuit (1010) is input, for reading a second gain corresponding to the input index out of a table which stores second gains corresponding to indices, and outputting the second gain to a smoothing circuit; the second gain circuit (1130), to which a first sound source vector output from the sound source signal decoding circuit (1110) and the second gain are input, for multiplying the first sound source vector by the second gain to generate a second sound source vector and outputting the generated second sound source vector to the adder (1050); the memory circuit (1240) for holding an excitation vector input thereto from the adder (1050) and outputting a held excitation vector, which was input thereto in the past, to the pitch signal

20 decoding circuit (1210); the pitch signal decoding circuit (1210), to which the past excitation vector held by the memory circuit (1240) and the index (which specifies a delay L_{pd}) output from the code input circuit (1010) are input, for cutting vectors of samples corresponding to the vector length from a point L_{pd}

25 samples previous to the starting point of the present frame,

generating a first pitch vector and outputting the first pitch vector to the first gain circuit (1230); the first gain decoding circuit (1220), to which the index output from the code input circuit (1010) is input, for reading a first gain corresponding to the input index out of a table and outputting the first gain to a first gain circuit; the first gain circuit (1230), to which the first pitch vector output from the pitch signal decoding circuit (1210) and the first gain output from the first gain decoding circuit (1220) are input, for multiplying the input first pitch vector by the first gain to generate a second pitch vector and outputting the generated second pitch vector to the adder; the adder (1050), to which the second pitch vector output from the first gain circuit (1230) and the second sound source vector output from the second gain circuit (1130) are input, for calculating the sum of these inputs and outputting the sum to the synthesis filter (1040) as an excitation vector; the smoothing coefficient calculation circuit (1310), to which LSP output from the LSP decoding circuit (1020) is input, for calculating average LSP in an nth frame, finding the amount of fluctuation of the LSP with respect to each subframe, finding a smoothing coefficient in the subframe and outputting the smoothing coefficient to a smoothing circuit; the smoothing circuit (1320), to which the smoothing coefficient output from the smoothing coefficient calculation circuit (1310) and the second gain output from the second gain decoding circuit are

input, for finding the average gain from the second gain in the subframe and outputting the second gain; the synthesis filter (1040), to which the excitation vector output from the adder (1050) and the linear prediction coefficients output from the linear prediction coefficient conversion circuit (1030) are input, for driving a synthesis filter, for which the linear prediction coefficients have been set, by the excitation vector to thereby calculate a reconstructed vector, and outputting the reconstructed vector from an output terminal; and the smoothing-quantity limiting circuit (7200), to which the second gain output from the second gain decoding circuit (1120) and the smoothed second gain output from the smoothing circuit (1320) are input, for finding the amount of fluctuation between the smoothed second gain output from the smoothing circuit (1320) and the second gain output from the second gain decoding circuit (1120), using the smoothed second gain as is when the amount of fluctuation is less than a predetermined threshold value, replacing the smoothed second gain with a smoothed second gain limited in terms of the values it is capable of taking on when the amount of fluctuation is equal to or greater than the threshold value, and outputting this smoothed second gain to the second gain circuit (1130).

In a second preferred mode of the present invention, as shown in Fig. 2, a speech signal decoding apparatus is for decoding information concerning an excitation signal and linear

prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal. Particularly, the apparatus includes an excitation-signal normalizing circuit (2510) for deriving a norm of the excitation signal at regular intervals and dividing the excitation signal by the norm; a smoothing circuit (1320) for smoothing the norm using a past value of the norm; a smoothing-quantity limiting circuit (7200) for limiting the value of the smoothed norm using an amount of fluctuation calculated from the norm and the smoothed norm; and an excitation-signal reconstruction circuit (2610) for multiplying the smoothed and limited norm by the excitation signal to thereby change the amplitude of the excitation signal in the intervals.

More specifically, the apparatus includes: an excitation-signal normalizing circuit (2510), to which an excitation vector in a subframe output from the adder (1050) is input, for calculating gain and a shape vector from the excitation vector every subframe or every sub-subframe obtained by subdividing a subframe, outputting the gain to the smoothing circuit (1320) and outputting the shape vector to an excitation-signal reconstruction circuit (2610); and the excitation-signal reconstruction circuit (2610), to which the

gain output from the smoothing-quantity limiting circuit (7200) and the shape vector output from the excitation-signal normalizing circuit (2510) are input, for calculating a smoothed excitation vector and outputting this excitation vector to the memory circuit (1240) and synthesis filter (1040). In this apparatus, the smoothing-quantity limiting circuit (7200) has the output of the smoothing circuit (1320) applied to one input terminal thereof and has the output of the excitation-signal normalizing circuit (2510), rather than the output of the second gain decoding circuit (1120) as in the first mode, applied to the other input terminal thereof, finds the amount of fluctuation between the smoothed gain output from the smoothing circuit (1320) and the gain output from the excitation-signal normalizing circuit (2510), uses the smoothed gain as is when the amount of fluctuation is less than a predetermined threshold value, replaces the smoothed gain with a smoothed gain limited in terms of values it is capable of taking on when the amount of fluctuation is equal to or greater than the threshold value, and supplies this smoothed gain to the excitation-signal reconstruction circuit (2610); the output of the second gain decoding circuit (1120) is input to the second gain circuit (1130) as second gain; and the smoothing circuit (1320) has the output of the excitation-signal normalizing circuit (2510), rather than the output of the second gain decoding circuit (1120) as in the first mode, applied thereto, as well as the output of

the smoothing coefficient calculation circuit (1310).

In a third preferred mode of the present invention, as shown in Fig. 3, a speech signal decoding apparatus is for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, and the apparatus includes: a voiced/unvoiced identification circuit (2020) for identifying a voiced segment and a noise segment with regard to the received signal using the decoded information; the excitation-signal normalizing circuit (2510) for calculating a norm of the excitation signal at regular intervals and dividing the excitation signal by the norm; the smoothing circuit (1320) for smoothing the norm using a past value of the norm; the smoothing-quantity limiting circuit (7200) for limiting the value of the smoothed norm using an amount of fluctuation calculated from the norm and the smoothed norm; and an excitation-signal reconstruction circuit (2610) for multiplying the smoothed and limited norm by the excitation signal to thereby change the amplitude of the excitation signal in the intervals.

More specifically, the apparatus includes: a power calculation circuit (3040), to which the reconstructed vector

output from the synthesis filter (1040) is input, for calculating the sum of the squares of the reconstructed vector and outputting the power to a voiced/unvoiced identification circuit; a speech mode decision circuit (3050), to which a past excitation vector held by the memory circuit (1240) and an index specifying a delay output from the code input circuit (1010) are input, for calculating a pitch prediction gain in a subframe from the past excitation vector and delay, determining a predetermined threshold value with respect to the pitch prediction gain or with respect to an in-frame average value of the pitch prediction gain in a certain frame, and setting a speech mode; the voiced/unvoiced identification circuit (2020), to which an LSP output from the LSP decoding circuit (1020), the speech mode output from the speech mode decision circuit (3050) and the power output from the power calculation circuit (3040) are input, for finding the amount of fluctuation of a spectrum parameter and identifying a voice segment and an unvoiced segment based upon the amount of fluctuation; a noise classification circuit (2030), to which amount-of-fluctuation information) and an identification flag output from the voiced/unvoiced identification circuit (2020) are input, for classifying noise; and a first changeover circuit (2110), to which the gain output from an excitation-signal normalizing circuit (2510), an identification flag output from the voiced/unvoiced identification circuit (2020) and a

classification flag output from the noise classification circuit (2030) are input, for changing over a switch in accordance with a value of the identification flag and a value of the classification flag to thereby switchingly output the gain to any one of a plurality of filters (2150, 2160, 2170) having different filter characteristics from one another; wherein the filter selected from among the plurality of filters (2150, 2160, 2170) has the gain output from the first changeover circuit (2110) applied thereto, smoothes the gain using a linear filter or non-linear filter and outputs the smoothed gain to the smoothing-quantity limiting circuit (7200) as a first smoothed gain; and the smoothing-quantity limiting circuit (7200) has the first smoothed gain output from the selected filter applied to one input terminal thereof, has the output of the excitation-signal normalizing circuit (2510) applied to the other input terminal thereof, finds the amount of fluctuation between the gain output from the excitation-signal normalizing circuit (2510) and the first smoothed gain output from the selected filter, uses the first smoothed gain as is when the amount of fluctuation is less than a predetermined threshold value, replaces the first smoothed gain with a smoothed gain limited in terms of values it is capable of taking on when the amount of fluctuation is equal to or greater than the threshold value, and supplies this smoothed gain to the excitation-signal reconstruction circuit (2610).

In a preferred mode of the present invention, as shown in Fig. 4, switching between use of the gain and use of the smoothed gain may be performed by a changeover circuit (7110) in accordance with an entered switching control signal when the speech signal is decoded.

In a preferred mode of the present invention, as shown in Fig. 5 or 6, the apparatus further includes a second changeover circuit (7110), to which the excitation vector output from the adder (1050) is input, for outputting the excitation vector to the synthesis filter (1040) or to the excitation-signal normalizing circuit (2510) in accordance with a changeover control signal, which has entered from an input terminal (50), when the speech signal is decoded.

Embodiments of the present invention will now be described with reference to the drawings in order to explain further the modes of the invention set forth above.

Fig. 1 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a first embodiment of the present invention. Components in Fig. 1 identical with or equivalent to those shown in Fig. 8 are identified by like reference characters.

In Fig. 1, the input terminal 10, output terminal 20, code input circuit 1010, LSP decoding circuit 1020, linear prediction coefficient conversion circuit 1030, sound source signal decoding circuit 1110, memory circuit 1240, pitch signal

decoding circuit 1210, first gain decoding circuit 1220, second gain decoding circuit 1120, first gain circuit 1230, second gain circuit 1130, adder 1050, smoothing coefficient calculation circuit 1310, smoothing circuit 1320 and synthesis filter 1040 are identical with the similarly identified components shown in Fig. 8 and need not be described again. The entire description made in the introductory part of this application with respect to Fig. 8 is hereby incorporated as part of the disclosure of the present invention, as far as it relates to the present invention, too. Primarily, only components that differ from those shown in Fig. 8 will be described below.

In the first embodiment of the present invention illustrated in Fig. 1, the smoothing-quantity limiting circuit 7200 has been added onto the arrangement of Fig. 8. As in the arrangement of Fig. 8, in the first embodiment of the invention it is assumed that the input of the bit sequence occurs in T_{fr} msec (e.g., 20 ms) and that computation of the reconstructed vector is performed in a period (subframe) of T_{fr}/N_{sfr} msec (e.g., 5 ms), where N_{sfr} is an integer (e.g., 4). Let frame length be L_{fr} samples (e.g., 320 samples) and let subframe length be L_{sfr} samples (e.g., 80 samples). The numbers of these samples is decided by the sampling frequency (e.g., 16 kHz) of the input signal.

The second gain (represented by g_2) output from the second gain decoding circuit 1120 and the smoothed second gain

(represented by $\overline{g_2}$) output from the smoothing circuit 1320 are input to the smoothing-quantity limiting circuit 7200.

The second gain $\overline{g_2}$ output from the smoothing circuit 1320 is limited in terms of the values it can take on in such a manner that it will not become abnormally large or abnormally small in comparison with the second gain g_2 output from the second gain decoding circuit 1120.

First, let amount d_{g_2} of fluctuation of $\overline{g_2}$ be represented by

$$d_{g_2} = |\overline{g_2} - g_2| / g_2 \quad \dots (11)$$

When the fluctuation amount d_{g_2} is less than a certain threshold value C_{g_2} , is used as is. When the fluctuation amount d_{g_2} is equal to or greater than the threshold value C_{g_2} , is limited. That is, $\overline{g_2}$ is replaced using the following criterion:

if $(d_{g_2} < C_{g_2})$ then $\overline{g_2} = \overline{g_2}$

else if $(\overline{g_2} - g_2 > 0)$ then $\overline{g_2} = (1 + C_{g_2}) \cdot g_2$

else $\overline{g_2} = (1 - C_{g_2}) \cdot g_2$

In other words,

if $d_{g_2} < C_{g_2}$ is true, then $\overline{g_2}$ is used as is;

if $d_{g_2} < C_{g_2}$ is false (i.e., if $d_{g_2} \geq C_{g_2}$ holds), then a substitution is made for as follows:

$\overline{g_2} = (1 + C_{g_2}) \cdot g_2$ when $\overline{g_2} - g_2 > 0$ holds true; and
 $\overline{g_2} = (1 - C_{g_2}) \cdot g_2$ when $\overline{g_2} - g_2 \leq 0$ holds true.

Here it is assumed that $C_{g_2} = 0.90$ holds.

Finally, the smoothing-quantity limiting circuit 7200

outputs the substitute $-g_2$ to the second gain circuit 1130.

A second embodiment of the present invention will now be described.

Fig. 2 is a block diagram illustrating the construction of
 5 a speech signal decoding apparatus according to a second
 embodiment of the present invention. Components in Fig. 2
 identical with or equivalent to those shown in Figs. 1 and 8 are
 identified by like reference characters.

As shown in Fig. 2, the second embodiment is so adapted that
 10 the norm of the excitation vector is smoothed instead of the
 decoded sound source gain (the second gain) as in the first
 embodiment. It should be noted that the input terminal 10,
 output terminal 20, code input circuit 1010, LSP decoding
 circuit 1020, linear prediction coefficient conversion circuit
 15 1030, sound source signal decoding circuit 1110, memory circuit
 1240, pitch signal decoding circuit 1210, first gain decoding
 circuit 1220, second gain decoding circuit 1120, first gain
 circuit 1230, second gain circuit 1130, adder 1050, smoothing
 coefficient calculation circuit 1310, smoothing circuit 1320
 20 and synthesis filter 1040 are identical with the similarly
 identified components shown in Fig. 8 and need not be described
 again.

As shown in Fig. 2, the second embodiment of the invention
 additionally provides the arrangement of the first embodiment
 25 illustrated in Fig. 1 with the excitation-signal normalizing

circuit 2510, the input to which is the output of the adder 1050, and with the excitation-signal reconstruction circuit 2610, the inputs to which are the outputs of the excitation-signal normalizing circuit 2510 and smoothing-quantity limiting
 5 circuit 7200 and the output of which is delivered to synthesis filter 1040 and memory circuit 1240.

The output of the smoothing circuit 1320 and the output of the excitation-signal normalizing circuit 2510 are input to the smoothing-quantity limiting circuit 7200, which supplies its
 10 output to the excitation-signal reconstruction circuit 2610. In other aspects this embodiment is similar to the first embodiment except for the signal connections.

The excitation-signal normalizing circuit 2510 and excitation-signal reconstruction circuit 2610 will now be
 15 described.

An excitation vector $X_{e_{xc}}^{(m)}(i)$ (where $i = 0, \dots, L_{sfr}-1$, $m = 0, \dots, N_{sfr}-1$) in an m th subsample output from the adder 1050 is input to the excitation-signal normalizing circuit 2510. The latter calculates gain and a shape vector from the excitation
 20 vector $X_{e_{xc}}^{(m)}(i)$ every subframe or every sub-subframe obtained by subdividing a subframe, outputs the gain to the smoothing circuit 1320 and outputs the shape vector to the excitation-signal reconstruction circuit 2610. A norm represented by Equation (12) below is used as the gain.

$$g_{exc}(m \cdot N_{sfr} + l) = \sqrt{\sum_{n=0}^{L_{sfr}/N_{sfr}-1} x_{exc}^{(m)}(l \cdot \frac{L_{sfr}}{N_{sfr}} + n)^2},$$

$$m=0, \dots, N_{sfr}-1, l=0, \dots, N_{sfr}-1 \quad \dots(12)$$

where N_{sfr} represents the number of subdivisions (the number of sub-subframes) of a subframe (e.g., $N_{sfr} = 2$). The excitation-signal normalizing circuit 2510 calculates the shape vector, which is obtained by dividing the excitation vector $x_{exc}^{(m)}(i)$ by gain $g_{exc}(j)$ (where $j = 0, \dots, N_{sfr} \cdot N_{sfr} - 1$), in accordance with Equation (13) below.

$$s_{exc}^{(m \cdot N_{sfr} + l)}(i) = \frac{1}{g_{exc}(m \cdot N_{sfr} + l)} \cdot x_{exc}^{(m)}(l \cdot \frac{L_{sfr}}{N_{sfr}} + i),$$

$$i=0, \dots, L_{sfr}/N_{sfr}-1, l=0, \dots, N_{sfr}-1, m=0, \dots, N_{sfr}-1 \quad \dots(13)$$

The gain $g_{exc}(j)$ (where $j=0, \dots, N_{sfr} \cdot N_{sfr} - 1$) output from the smoothing circuit and a shape vector $s_{exc}^{(j)}(i)$ output from the excitation-signal normalizing circuit 2510 are input to the excitation-signal reconstruction circuit 2610. The latter calculates a (smoothed) excitation vector $\hat{x}_{exc}^{(m)}(i)$ in accordance with Equation (14) below and outputs the excitation vector to the memory circuit 1240 and synthesis filter 1040.

$$\hat{x}_{exc}^{(m)}(l \cdot \frac{L_{sfr}}{N_{sfr}} + i) = g_{exc}(m \cdot N_{sfr} + l) \cdot s_{exc}^{(m \cdot N_{sfr} + l)}(i),$$

$$i=0, \dots, L_{sfr}/N_{sfr}-1, l=0, \dots, N_{sfr}-1, m=0, \dots, N_{sfr}-1 \quad \dots(14)$$

A third embodiment of the present invention will now be described.

Fig. 3 is a block diagram illustrating the construction of

a speech signal decoding apparatus according to a second embodiment of the present invention. Components in Fig. 3 identical with or equivalent to those shown in Figs. 2 and 8 are identified by like reference characters. The input terminal 10, output terminal 20, code input circuit 1010, LSP decoding circuit 1020, linear prediction coefficient conversion circuit 1030, sound source signal decoding circuit 1110, memory circuit 1240, pitch signal decoding circuit 1210, first gain decoding circuit 1220, second gain decoding circuit 1120, first gain circuit 1230, second gain circuit 1130, adder 1050, smoothing coefficient calculation circuit 1310, smoothing circuit 1320 and synthesis filter 1040 are identical with the similarly identified components shown in Fig. 8, and the excitation-signal normalizing circuit 2510 and excitation-signal reconstruction circuit 2610 are identical with those shown in Fig. 2. Accordingly, these components need not be described again. Further, the smoothing-quantity limiting circuit 7200 is similar to that of the first embodiment except for a difference in the connections.

As shown in Fig. 3, the third embodiment of the invention additionally provides the arrangement of the second embodiment illustrated in Fig. 2 with the power calculation circuit 3040, speech mode decision circuit 3050, voiced/unvoiced identification circuit 2020, noise classification circuit 2030, first changeover circuit 2110, a first filter 2150, a second

filter 2160 and a third filter 2170. How this embodiment differs from the second embodiment will now be described.

The reconstructed vector output from the synthesis filter 1040 is input to the power calculation circuit 3040. The latter calculates the sum of the squares of the reconstructed vector and outputs the power to a voiced/unvoiced identification circuit 2020. Here the power calculation circuit 3040 calculates power every subframe and uses the reconstructed vector output from the synthesis filter 1040 in an $(m-1)$ th subframe in the calculation of power in an m th subframe. Letting the reconstructed vector be represented $S_{syn}(i)$, $i=0, \dots, L_{sf}$, power E_{pow} is calculated in accordance with Equation (15) below.

$$E_{pow} = \frac{1}{L_{sf}} \sum_{i=0}^{L_{sf}-1} S_{syn}^2(i) \quad \dots(15)$$

It is also possible to use the norm of the reconstructed vector represented by Equation (16) below instead of Equation (15).

$$E_{pow} = \sqrt{\sum_{i=0}^{L_{sf}-1} S_{syn}^2(i)} \quad \dots(16)$$

A past excitation vector $e_{mem}(i)$, $i=0, \dots, L_{mem}-1$ held by the memory circuit (1240) and the index output from the code input circuit 1010 are input to the speech mode decision circuit 3050. The index specifies a delay L_{pd} . Here L_{mem} represents a constant decided by the maximum value of L_{pd} . The speech mode decision

circuit 3050 calculates a pitch prediction gain $G_{e_{mem}}(m)$, $m=0, 1, \dots, N_{sfr}$ in the m th subframe from a past excitation vector $e_{mem}(i)$ and the delay L_{pd} .

$$G_{e_{mem}}(m) = 10 \cdot \log_{10}(g_{e_{mem}}(m)) \quad \dots (17)$$

5 where

$$g_{e_{mem}}(m) = \frac{1}{1 - \frac{E_c^2(m)}{E_{a1}(m)E_{a2}(m)}}$$

$$E_{a1}(m) = \sum_{i=0}^{L_{pe}-1} e_{mem}^2(i)$$

$$E_{a2}(m) = \sum_{i=0}^{L_{pe}-1} e_{mem}^2(i - L_{pd})$$

$$E_c(m) = \sum_{i=0}^{L_{pe}-1} e_{mem}(i) e_{mem}(i - L_{pd}) \quad \dots (18)$$

The speech mode decision circuit 3050 executes the following threshold-value processing with respect to the pitch prediction gain $G_{e_{mem}}(m)$ or with respect to an in-frame average value of the pitch prediction gain $G_{e_{mem}}(m)$ in the n th frame, thereby setting a speech mode S_{mode} :

if ($\neg G_{e_{mem}}(n) \geq 3.5$) then $S_{mode} = 2$
 else $S_{mode} = 0$

That is, if $\neg G_{e_{mem}}(n) \geq 3.5$ holds, then the S_{mode} is 2;

15 otherwise, the S_{mode} is 0.

The speech mode decision circuit 3050 outputs the speech mode S_{mode} to the voiced/unvoiced identification circuit 2020.

LSP $q_j^{(m)}(n)$ output from the LSP decoding circuit 1020, the speech mode S_{mode} output from the speech mode decision circuit
 20 3050 and the power E_{pow} output from the power calculation circuit

3040 are input to the voiced/unvoiced identification circuit
2020. A procedure for obtaining the amount of fluctuation of
a spectrum parameter is indicated below. Here $\text{LSP } \hat{q}_j^{(m)}(n)$ is
used as the spectrum parameter. The voiced/unvoiced

5 identification circuit 2020 calculates a long-term average $\bar{q}_j^{(n)}(n)$ in a (n) frame in accordance with Equation (19) below.

$$\bar{q}_j(n) = \beta_0 \cdot \bar{q}_j(n-1) + (1-\beta_0) \cdot \hat{q}_j^{(N_{\text{tr}})}(n), j=1, \dots, N_p \quad \dots(19)$$

where $\beta_0 = 0.9$. Amount $d_q(n)$ of deviation (fluctuation) of LSP
in the n th frame is defined by Equation (20) below.

$$10 \quad d_q(n) = \sum_{j=1}^{N_q} \sum_{m=1}^{N_{\text{tr}}} \frac{D_{qj}^{(m)}(n)}{\bar{q}_j(n)} \quad \dots(20)$$

where $D_{qj}^{(m)}(n)$ corresponds to the distance between $\bar{q}_j(n)$ and
 $\hat{q}_j^{(m)}(n)$. For example, Equations (21a) and (21b) below are
used.

$$D_{qj}^{(m)}(n) = (\bar{q}_j(n) - \hat{q}_j^{(m)}(n))^2 \quad \dots(21a)$$

$$D_{qj}^{(m)}(n) = |\bar{q}_j(n) - \hat{q}_j^{(m)}(n)| \quad \dots(21b)$$

15 In this embodiment, the absolute value of Equation (21b)
is used as the distance.

Approximate correspondence can be established between an
interval where the fluctuation $d_q(n)$ is large and a voiced
segment and between an interval where the fluctuation $d_q(n)$ is
20 small and an unvoiced (noise) segment.

However, the amount of fluctuation $d_q(n)$ varies greatly
with time and the range of values of $d_q(n)$ in a voiced segment
and the range of values of $d_q(n)$ in an unvoiced segment overlap

each other. A problem which arises is that it is not easy to set a threshold value for distinguishing between voiced and unvoiced segments. Accordingly, the long-term average of $d_q(n)$ is used in the identification of the voiced and unvoiced segments.

The long-term average of $\bar{d}_{q1}(n)$ is found using a linear or non-linear filter. By way of example, the mean, median or mode of $d_q(n)$ can be employed as $\bar{d}_{q1}(n)$. Here Equation (22) is used.

$$\bar{d}_{q1}(n) = \beta \cdot \bar{d}_{q1}(n-1) + (1-\beta_1) \cdot d_q(n) \quad \dots(22)$$

where $\beta_1 = 0.9$ holds.

An identification flag S_{vs} is decided by applying threshold-value processing to $(\bar{d}_{q1}(n) \geq C_{th1})$ then $S_{vs} = 1$ else $S_{vs} = 0$

That is, if $\bar{d}_{q1}(n) \geq C_{th1}$ holds, S_{vs} is 1; otherwise, $S_{vs} = 0$ holds.

Here C_{th1} represents a certain constant (e.g., 2.2), and $S_{vs} = 1$ corresponds to a voiced segment and $S_{vs} = 0$ to an unvoiced segment.

Since $d_q(n)$ is small in an interval where there is a high degree of steadiness, even in a voiced segment, the voiced segment may be mistaken for an unvoiced segment. Accordingly, in a case where the power of a frame is high and the pitch prediction gain is high, the segment is regarded as being a voiced segment. When $S_{vs} = 0$ holds, S_{vs} is revised in accordance

with the following criterion:

if ($\hat{E}_{rms} \geq C_{rms}$ and $S_{mode} \geq 2$) then $S_{vs} = 1$

else $S_{vs} = 0$

That is, if $\hat{E}_{rms} \geq C_{rms}$ and $S_{mode} \geq 2$ hold, S_{vs} is 1;

5 otherwise, S_{vs} is 0.

Here C_{rms} (where rms stands for the root-mean-square value) represents a certain constant (e.g., 10,000). The relation $S_{mode} \geq 2$ corresponds to a case where the in-frame average value of pitch prediction gain is equal to or greater than 3.5 dB. The
10 voiced/unvoiced identification circuit 2020 outputs S_{vs} to the noise classification circuit 2030 and first changeover circuit 2110 and outputs to the noise classification circuit 2030.

The inputs to the noise classification circuit 2030 are $d_{q1}^-(n)$ and S_{vs} output from the voiced/unvoiced identification
15 circuit 2020. The noise classification circuit 2030 obtains a value, which reflects the average behavior of $d_{q1}^-(n)$, in an unvoiced segment (noise segment) by using a linear or non-linear filter. The noise classification circuit 2030 calculates $d_{q2}^-(n)$ in accordance with Equation (23) below when $S_{vs} = 0$ holds:

$$20 \quad \bar{d}_{q2}^-(n) = \beta \cdot \bar{d}_{q2}^-(n-1) + (1-\beta_2) \cdot d_{q1}^-(n) \quad \dots(23)$$

where $\beta_2 = 0.94$ holds. The noise classification circuit 2030 classifies noise by applying threshold-value processing to $d_{q2}^-(n)$ and decides a classification flag S_{nx} .

if ($d_{q2}^-(n) \geq C_{th2}$ and $S_{mode} \geq 2$) then $S_{nx} = 1$

25 else $S_{nx} = 0$

That is, $d_{q2}^-(n) \geq C_{th2}$ then $S_{mod} \geq 2$ hold, the classification flag S_{nx} is 1, otherwise, the classification flag S_{nx} is 0.

Here C_{th2} represents a certain constant (1.7), $S_{nx}=1$ corresponds to noise in which the temporal change of the frequency characteristic is non-steady and $S_{nx}=0$ corresponds to noise in which the temporal change of the frequency characteristic is steady. The noise classification circuit 2030 outputs S_{nx} to the first changeover circuit 2110.

The gain $g_{exc}(j)$ (where $j=0, \dots, N_{sfr} \cdot N_{sfr} - 1$) output from the excitation-signal normalizing circuit 2510, the identification flag S_{vs} output from the voiced/unvoiced identification circuit 2020 and the classification flag S_{nx} output from the noise classification circuit 2030 are input to the first changeover circuit 2110. The latter changes over a switch in accordance with the value of the identification flag and the value of the classification flag, thereby outputting the gain $G_{exc}(j)$ to the first filter 2150 when $S_{vs}=0$ and $S_{nx}=0$ hold, to the second filter 2160 when $S_{vs}=0$ and $S_{nx}=1$ hold and to the third filter 2170 when $S_{vs}=1$ holds.

The gain $g_{exc}(j)$ (where $j=0, \dots, N_{sfr} \cdot N_{sfr} - 1$) output from the first changeover circuit 2110 is input to the first filter 2150, which proceeds to smooth the gain using a linear or non-linear filter, adopts this as a first smoothed gain $g_{exc,1}(j)$ and outputs to the excitation-signal reconstruction

circuit 2610. Here use is made of a filter represented by Equation (24) below.

$$\bar{g}_{exc,1}(n) = r_{21} \cdot \bar{g}_{exc,1}(n-1) + (1-r_{21}) \cdot g_{exc}(n) \quad \dots(24)$$

where $\bar{g}_{exc,1}(-1)$ corresponds to $\bar{g}_{exc,1}(N_{sfr} \cdot N_{sfr} - 1)$ in the preceding frame. Further, it is assumed that $r_{21} = 0.9$ holds.

The gain $g_{exc}(j)$ (where $j=0, \dots, N_{sfr} \cdot N_{sfr} - 1$) output from the first changeover circuit 2110 is input to the second filter 2160, which proceeds to smooth the gain using a linear or non-linear filter, adopts this as a second smoothed gain $\bar{g}_{exc,2}(j)$ and outputs to the excitation-signal reconstruction circuit 2610. Here use is made of a filter represented by Equation (25) below.

$$\bar{g}_{exc,2}(n) = r_{22} \cdot \bar{g}_{exc,2}(n-1) + (1-r_{22}) \cdot g_{exc}(n) \quad \dots(25)$$

where $\bar{g}_{exc,2}(-1)$ corresponds to $\bar{g}_{exc,2}(N_{sfr} \cdot N_{sfr} - 1)$ in the preceding frame. Further, it is assumed that $r_{22} = 0.9$ holds.

The gain $G_{exc}(j)$ (where $j=0, \dots, N_{sfr} \cdot N_{sfr} - 1$) output from the first changeover circuit 2110 is input to the third filter 2170, which proceeds to smooth the gain using a linear or non-linear filter, adopts this as a third smoothed gain $\bar{g}_{exc,3}(j)$ and outputs to the excitation-signal reconstruction circuit 2610. Here it is assumed that $\bar{g}_{exc,3}(n) = g_{exc}(n)$ holds.

Fig. 4 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a fourth embodiment of the present invention. In the fourth embodiment,

as shown in Fig. 4, an input terminal 50 and a second changeover circuit 7110 are added to the arrangement of the first embodiment shown in Fig. 1 and the connections are changed accordingly. The added input terminal 50 and the second changeover circuit 7110 will be described below.

A changeover control signal enters from the input terminal 50. The changeover control signal is input to the changeover circuit 7110 via the input terminal 50, and the second gain output from the second gain decoding circuit 1120 is input to the changeover circuit 7110. In accordance with the changeover control signal, the changeover circuit 7110 outputs the second gain to the second gain circuit 1130 or to the smoothing circuit 1320.

Fig. 5 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a fifth embodiment of the present invention. In the fifth embodiment, as shown in Fig. 5, the input terminal 50 and the second changeover circuit 7110 are added to the arrangement of the second embodiment shown in Fig. 2 and the connections are changed accordingly. The input terminal 50 and the second changeover circuit 7110 will be described below.

A changeover control signal enters from the input terminal 50. The changeover control signal is input to the changeover circuit 7110 via the input terminal 50, and the excitation vector output from the adder 1050 is input to the changeover circuit

7110. In accordance with the changeover control signal, the changeover circuit 7110 outputs the excitation vector to the synthesis filter 1040 or to the excitation-signal normalizing circuit 2510.

Fig. 6 is a block diagram illustrating the construction of a speech signal decoding apparatus according to a sixth embodiment of the present invention. In the sixth embodiment, as shown in Fig. 6, the input terminal 50 and the second changeover circuit 7110 are added to the arrangement of the third embodiment shown in Fig. 3 and the connections are changed accordingly. The input terminal 50 and the second changeover circuit 7110 are identical with those described in the fifth embodiment of Fig. 5 and need not be described again.

The speech signal encoder in the conventional speech signal encoding/decoding apparatus shown in Fig. 8 may be used as the speech signal encoder in the speech signal encoding/decoding apparatus as a seventh embodiment of the present invention.

The speech signal decoding apparatus in each of the foregoing embodiments of the present invention may be implemented by computer control using a digital signal processor or the like. Fig. 7 is a diagram schematically illustrating the construction of an apparatus for a case where the speech signal decoding processing of each of the foregoing embodiments is implemented by a computer in an eighth embodiment of the present invention. A computer 1 for executing a program that has been

read out of a recording medium 6 executes speech signal decoding processing for decoding information concerning at least a sound source signal, gain and linear prediction coefficients from a received signal, generating an excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal. To this end, a program has been recorded on the recording medium 6. The program is for executing (a) processing for performing smoothing using a past value of gain and calculating an amount of fluctuation between the original gain and the smoothed gain, and (b) processing for limiting the value of the smoothed gain in conformity with the value of the amount of fluctuation and decoding the speech signal using the smoothed, limited gain. This program is read out of the recording medium 6 and stored in a memory 3 via a recording-medium read-out unit 5 and an interface 4, and the program is executed. The program may be stored in a mask ROM or the like or in a non-volatile memory such as a flash memory. Besides a non-volatile memory, the recording medium may be a medium such as a CD-ROM, floppy disk, DVD (Digital Versatile Disk) or magnetic tape. In a case where the program is transmitted by a computer from a server to a communication medium, the recording medium would include the communication medium to which the program is communicated by wire or wirelessly.

The computer 1 for executing a program that has been read out of a recording medium 6 executes speech signal decoding processing for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal. To this end, a program has been recorded on the recording medium 6. The program is for executing (a) processing for calculating a norm of the excitation signal at regular intervals and smoothing the norm using a past value of the norm; and (b) processing for limiting the value of the smoothed norm using an amount of fluctuation calculated from the norm and the smoothed norm, changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited, and driving the filter by the excitation signal the amplitude of which has been changed.

The computer 1 for executing a program that has been read out of a recording medium 6 executes speech signal decoding processing for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by

the excitation signal to thereby decode a speech signal. To this end, a program has been recorded on the recording medium 6. The program is for executing (a) processing for identifying a voiced segment and a noise segment with regard to the received signal using the decoded information; (b) processing for calculating a norm of the excitation signal at regular intervals in the noise segment, smoothing the norm using a past value of the norm and limiting the value of the smoothed norm using an amount of fluctuation calculated from the norm and the smoothed norm; (c) processing for changing the amplitude of the excitation signal in the intervals using the norm and the norm that has been smoothed and limited, and driving the filter by the excitation signal the amplitude of which has been changed.

Thus, in accordance with the present invention as described above, it is possible to suppress the occurrence of abnormal sound in noise segments, such sound being caused when, in the smoothing of sound source gain (second gain), the sound source gain smoothed in a noise segment takes on a value much larger than that of the sound source gain before smoothing.

The reason for this effect is that the values which the smoothed sound source gain is capable of taking on are limited on the basis of amount of fluctuation, which is calculated using the difference between smoothed sound source gain and the sound source gain before smoothing, in such a manner that sound source gain that has been smoothed in a noise interval will not take

on a very large value in comparison with the sound source gain before smoothing. The entire disclosure of References 1, 2, 3 and 4 is herein incorporated by reference thereto as the components and/or processings making up parts of the present invention, as far as these relate to the implementation of the present invention. The same applies to the disclosure of Reference 5.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

It should be noted that other objects, features and aspects of the present invention will become apparent in the entire disclosure and that modifications may be done without departing the gist and scope of the present invention as disclosed herein and claimed as appended herewith.

Also it should be noted that any combination of the disclosed and/or claimed elements, matters and/or items may fall under the modifications aforementioned.

WHAT IS CLAIMED IS:

1. A speech signal decoding method for decoding information concerning at least a sound source signal, gain and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from
5 decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising:

a first step of smoothing the gain using a past value of the gain;

10 a second step of limiting the value of the smoothed gain based upon an amount of fluctuation calculated from the gain and the smoothed gain; and

a third step of decoding the speech signal using the gain that has been smoothed and limited.

2. A speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded
5 information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising:

a first step of deriving a norm of the excitation signal at regular intervals;

10 a second step of smoothing the norm using a past value of

the norm;

a third step of limiting the value of the smoothed norm based upon an amount of fluctuation calculated from the norm and the smoothed norm;

15 a fourth step of changing the amplitude of the excitation signal in said intervals using said norm and the norm that has been smoothed and limited; and

a fifth step of driving the filter by the excitation signal the amplitude of which has been changed.

3. A speech signal decoding method for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and the linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising:

5 a first step of identifying a voiced segment and a noise segment with regard to the received signal using the decoded information;

10 a second step of deriving a norm of the excitation signal at regular intervals in the noise segment;

a third step of smoothing the norm using a past value of the norm;

15 a fourth step of limiting the value of the smoothed norm based upon an amount of fluctuation derived from the norm and

the smoothed norm;

a fifth step of changing the amplitude of the excitation signal in said intervals using the norm and the norm that has been smoothed and limited; and

a sixth step of driving the filter by the excitation signal the amplitude of which has been changed.

4. The method according to claim 1, wherein the amount of fluctuation is represented by dividing an absolute value of a difference between the gain and the smoothed gain by the gain, and the value of the smoothed gain is limited in such a manner that the amount of fluctuation will not exceed a predetermined threshold value.

5. The method according to claim 2, wherein the amount of fluctuation is represented by dividing an absolute value of a difference between the norm and the smoothed norm by the norm, and the value of the smoothed norm is limited in such a manner that the amount of fluctuation will not exceed a predetermined threshold value.

6. The method according to claim 3, wherein the amount of fluctuation is represented by dividing an absolute value of a difference between the norm and the smoothed norm by the norm, and the value of the smoothed norm is limited in such a manner that the amount of fluctuation will not exceed a predetermined threshold value.

7. The method according to claim 2, wherein the excitation

signal in said intervals is divided by the norm in said intervals and the quotient is multiplied by the smoothed norm in said intervals to thereby change the amplitude of the excitation
5 signal.

8. The method according to claim 3, wherein the excitation signal in said intervals is divided by the norm in said intervals and the quotient is multiplied by the smoothed norm in said intervals to thereby change the amplitude of the excitation
5 signal.

9. The method according to claim 1, wherein switching between use of the gain and use of the smoothed gain is performed in accordance with an entered switching control signal when the speech signal is decoded.

10. The method according claim 2, wherein switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance with an entered switching control signal when the speech signal
5 is decoded.

11. The method according claim 3, wherein switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance with an entered switching control signal when the speech signal
5 is decoded

12. A speech signal encoding and decoding method comprising the steps of:

encoding an input speech signal by expressing the input
speech signal by an excitation signal and linear prediction
5 coefficients; and

performing decoding by the speech signal decoding method
set forth in claim 1.

13. A speech signal encoding and decoding method comprising the
steps of:

encoding an input speech signal by expressing the input
speech signal by an excitation signal and linear prediction
5 coefficients; and

performing decoding by the speech signal decoding method
set forth in claim 2.

14. A speech signal encoding and decoding method comprising the
steps of:

encoding an input speech signal by expressing the input
speech signal by an excitation signal and linear prediction
5 coefficients; and

performing decoding by the speech signal decoding method
set forth in claim 3

15. A speech signal decoding apparatus for decoding
information concerning at least a sound source signal, gain and
linear prediction coefficients from a received signal,
generating an excitation signal and linear prediction
5 coefficients from the decoded information, and driving a filter,
which is constituted by the linear prediction coefficients, by

the excitation signal to thereby decode a speech signal,
comprising:

5 a smoothing circuit smoothing the gain using a past value
10 of the gain; and

a smoothing-quantity limiting circuit limiting the value
of the smoothed gain based upon an amount of fluctuation
calculated from the gain and the smoothed gain.

16. A speech signal decoding apparatus for decoding
information concerning an excitation signal and linear
prediction coefficients from a received signal, generating the
excitation signal and linear prediction coefficients from the
5 decoded information, and driving a filter, which is constituted
by the linear prediction coefficients, by the excitation signal
to thereby decode a speech signal, comprising:

an excitation-signal normalizing circuit deriving a norm
of the excitation signal at regular intervals and dividing the
10 excitation signal by the norm;

a smoothing circuit smoothing the norm using a past value
of the norm;

a smoothing-quantity limiting circuit limiting the value
of the smoothed norm based upon an amount of fluctuation
15 calculated from the norm and the smoothed norm; and

an excitation-signal reconstruction circuit multiplying
the smoothed and limited norm by the excitation signal to thereby
change the amplitude of the excitation signal in said intervals.

17. A speech signal decoding apparatus for decoding information concerning an excitation signal and linear prediction coefficients from a received signal, generating the excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal, comprising:

a voiced/unvoiced identification circuit identifying a voiced segment and a noise segment with regard to the received signal using the decoded information;

an excitation-signal normalizing circuit deriving a norm of the excitation signal at regular intervals and dividing the excitation signal by the norm;

a smoothing circuit smoothing the norm using a past value of the norm;

a smoothing-quantity limiting circuit limiting the value of the smoothed norm based upon an amount of fluctuation calculated from the norm and the smoothed norm; and

an excitation-signal reconstruction circuit multiplying the smoothed and limited norm by the excitation signal to thereby change the amplitude of the excitation signal in said intervals.

18. The apparatus according to claim 15, wherein the amount of fluctuation is represented by dividing an absolute value of a difference between the gain and the smoothed gain by the gain, and the value of the smoothed gain is limited in such a manner

5 that the amount of fluctuation will not exceed a predetermined threshold value.

19. The apparatus according to claim 16, wherein the amount of fluctuation is represented by dividing the absolute value of the difference between the norm and the smoothed norm by the norm, and the value of the smoothed norm is limited in such a manner
5 that the amount of fluctuation will not exceed a predetermined threshold value.

20. The apparatus according to claim 17, wherein the amount of fluctuation is represented by dividing the absolute value of the difference between the norm and the smoothed norm by the norm, and the value of the smoothed norm is limited in such a manner
5 that the amount of fluctuation will not exceed a predetermined threshold value.

21. The apparatus according to claim 15, wherein the apparatus comprises a switching circuit in which switching between use of the gain and use of the smoothed gain is performed in accordance with an entered switching control signal when the speech signal
5 is decoded.

22. The apparatus according to claim 16, wherein the apparatus comprises a switching circuit in which switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance
5 with an entered switching control signal when the speech signal is decoded.

00000426.103100

23. The apparatus according to claim 17, wherein the apparatus comprises a switching circuit in which switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed is performed in accordance with an entered switching control signal when the speech signal is decoded.

24. A speech signal encoding and decoding apparatus comprising:

a speech signal encoder encoding an input speech signal by expressing the input speech signal by an excitation signal and linear prediction coefficients; and

the speech signal decoding apparatus set forth in claim 15.

25. A speech signal encoding and decoding apparatus comprising:

a speech signal encoder encoding an input speech signal by expressing the input speech signal by an excitation signal and linear prediction coefficients; and

the speech signal decoding apparatus set forth in claim 16.

26. A speech signal encoding and decoding apparatus comprising:

a speech signal encoder encoding an input speech signal by expressing the input speech signal by an excitation signal and linear prediction coefficients; and

the speech signal decoding apparatus set forth in claim 17.

27. A program product for causing a computer to execute processing (a) and (b) below, wherein the computer constitutes a speech signal decoding apparatus for decoding information concerning at least a sound source signal, gain and linear
5 prediction coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal:

10 (a) processing of performing smoothing using a past value of a gain and calculating an amount of fluctuation between the gain and a smoothed gain; and

15 (b) processing of limiting the value of the smoothed gain in conformity with the value of the amount of fluctuation and decoding the speech signal using the smoothed, limited gain.

28. A program product for causing a computer to execute processing (a) to (c) below, wherein the computer constitutes a speech signal decoding apparatus for decoding information concerning an excitation signal and linear prediction
5 coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to

thereby decode a speech signal:

10 (a) processing of calculating a norm of an excitation signal at regular intervals and smoothing the norm using a past value of the norm;

(b) processing of limiting the value of the smoothed norm in conformity with the value of an amount of fluctuation
15 calculated from the norm and the smoothed norm; and

(c) processing of changing the amplitude of the excitation signal in said intervals using the norm and the norm that has been smoothed and limited, and driving the filter by the excitation signal the amplitude of which has been changed.

29. A program product for causing a computer to execute processing (a) to (d) below, wherein the computer constitutes a speech signal decoding apparatus for decoding information concerning an excitation signal and linear prediction
5 coefficients from a received signal, generating an excitation signal and linear prediction coefficients from the decoded information, and driving a filter, which is constituted by the linear prediction coefficients, by the excitation signal to thereby decode a speech signal:

10 (a) processing of identifying a voiced segment and a noise segment with regard to a received signal using decoded information;

(b) processing of calculating a norm of an excitation signal at regular intervals in the noise segment and smoothing

15 the norm using a past value of the norm;

(c) processing of limiting the value of the smoothed norm in conformity with an amount of fluctuation calculated from the norm and the smoothed norm; and

(d) processing of changing the amplitude of the excitation
20 signal in said intervals using the norm and the norm that has been smoothed and limited, and driving the filter by the excitation signal the amplitude of which has been changed.

30. The program product according to claim 27, wherein said program product comprises a program for processing of representing the amount of fluctuation by dividing an absolute value of a difference between the gain and the smoothed gain by
5 the gain, and limiting the value of the smoothed gain in such a manner that the amount of fluctuation will not exceed a predetermined threshold value.

31. The program product according to claim 28, wherein said program product comprises a program for processing of representing the amount of fluctuation by dividing an absolute value of a difference between the norm and the smoothed norm by
5 the norm, and limiting the value of the smoothed norm in such a manner that the amount of fluctuation will not exceed a predetermined threshold value.

32. The program product according to claim 29, wherein said program product comprises a program for processing of representing the amount of fluctuation by dividing an absolute

value of a difference between the norm and the smoothed norm by
5 the norm, and limiting the value of the smoothed norm in such
a manner that the amount of fluctuation will not exceed a
predetermined threshold value.

33. The program product according to claim 28, wherein said
program product comprises a program for processing of dividing
the excitation signal in said intervals by the norm in said
intervals and multiplying the quotient by the smoothed norm in
said intervals to thereby change the amplitude of the excitation
5 signal.

34. The program product according to claim 29, wherein said
program product comprises a program for processing of dividing
the excitation signal in said intervals by the norm in said
intervals and multiplying the quotient by the smoothed norm in
said intervals to thereby change the amplitude of the excitation
5 signal.

35. The program product according to claim 27, wherein said
program product comprises a program for processing of switching
between use of the gain and use the smoothed gain in accordance
with an entered switching control signal when the speech signal
5 is decoded.

36. The program product according to claim 28, wherein said
program product comprises a program for processing of switching
between use of the excitation signal and use of the excitation
signal the amplitude of which has been changed in accordance with

5 an entered switching control signal when the speech signal is decoded.

37. The program product according to claim 29, wherein said program product comprises a program for processing of switching between use of the excitation signal and use of the excitation signal the amplitude of which has been changed in accordance with
5 an entered switching control signal when the speech signal is decoded.

38. A program product comprising a program for causing said computer to execute processing of performing decoding by the speech signal decoding method set forth in claim 1, when an input speech signal has been encoded by expressing the input speech
5 signal by an excitation signal and linear prediction coefficients.

39. A program product comprising a program for causing said computer to execute processing of performing decoding by the speech signal decoding method set forth in claim 2, when an input speech signal has been encoded by expressing the input speech
5 signal by an excitation signal and linear prediction coefficients.

40. A program product comprising a program for causing said computer to execute processing of performing decoding by the speech signal decoding method set forth in claim 3, when an input speech signal has been encoded by expressing the input speech
5 signal by an excitation signal and linear prediction

coefficients.

41. A speech signal decoding apparatus comprising:

(a) a code input circuit splitting code of a bit sequence of an encoded input signal that enters from an input terminal, converting the code to indices that correspond to a plurality of decode parameters, outputting an index corresponding to a line spectrum pair, termed hereinafter "LSP", which represents the frequency characteristic of the input signal, to an LSP decoding circuit, outputting an index corresponding to a delay that represents a pitch period of the input signal to a pitch signal decoding circuit, outputting an index corresponding to a sound source vector comprising a random number or a pulse train to a sound source signal decoding circuit, outputting an index corresponding to a first gain to a first gain decoding circuit, and outputting an index corresponding to a second gain to a second gain decoding circuit;

(b) an LSP decoding circuit, to which the index output from said code input circuit is input, and which reads the LSP corresponding to the input index out of a table which stores LSPs corresponding to indices, obtains an LSP in a subframe of the present frame and outputs the LSP;

(c) a linear prediction coefficient conversion circuit, to which the LSP output from said LSP decoding circuit is input, and which converts the LSP to linear prediction coefficients and outputs the coefficients to a synthesis filter;

25 (d) a sound source signal decoding circuit, to which the
index output from said code input circuit is input, and which
reads a sound source vector corresponding to the index out of
a table storing sound source vectors corresponding to indices,
and outputs the sound source vector to a second gain decoding
30 circuit;

(e) a second gain decoding circuit, to which the index
output from said code input circuit is input, and which reads
a second gain corresponding to the input index out of a table
storing second gains corresponding to indices, and outputs the
35 second gain to a smoothing circuit;

(f) a second gain circuit, to which a first sound source
vector output from said sound source signal decoding circuit and
the second gain are input, and which multiplies the first sound
source vector by the second gain to generate a second sound
40 source vector and outputs the generated second sound source
vector to an adder;

(g) a memory circuit holding an excitation vector input
thereto from said adder and outputting a held excitation vector,
which was input thereto in the past, to a pitch signal decoding
45 circuit;

(h) a pitch signal decoding circuit, to which the past
excitation vector held by said memory circuit and the index
output from said code input circuit are input, with said index
specifying a delay, and which cuts out vectors of samples

50 corresponding to a vector length from a point previous to the starting point of the present frame by an amount corresponding to the delay to thereby generate a first pitch vector, and outputs the first pitch vector to a first gain circuit;

55 (i) a first gain decoding circuit, to which the index output from said code input circuit is input, and which reads a first gain corresponding to the input index out of a table storing first gains corresponding to indices, and outputs the first gain to a first gain circuit;

60 (j) a first gain circuit, to which the first pitch vector output from said pitch signal decoding circuit and the first gain output from said first gain decoding circuit are input, and which multiplies the input first pitch vector by the first gain to generate a second pitch vector, and outputs the generated second pitch vector to said adder;

65 (k) an adder, to which the second pitch vector output from said first gain circuit and the second sound source vector output from said second gain circuit are input, and which calculates the sum of these inputs, and outputs the sum to a synthesis filter as an excitation vector;

70 (l) a smoothing coefficient calculation circuit, to which LSP output from said LSP decoding circuit is input, and which calculates average LSP in the present frame, finds the amount of fluctuation of the LSP with respect to each subframe, finds a smoothing coefficient in the subframe, and outputs the

75 smoothing coefficient to a smoothing circuit;

(m) a smoothing circuit, to which the smoothing coefficient output from said smoothing coefficient calculation circuit and the second gain output from said second gain decoding circuit are input, and which finds an average gain from the second gain
80 in the subframe, and outputs the second gain;

(n) a synthesis filter, to which the excitation vector output from said adder and the linear prediction coefficients output from said linear prediction coefficient conversion circuit are input, and which drives a synthesis filter, for that
85 the linear prediction coefficients have been set, by the excitation vector to thereby calculate a reconstructed vector, and outputs the reconstructed vector from an output terminal; and

(o) a smoothing-quantity limiting circuit, to which the second gain output from said second gain decoding circuit and the smoothed second gain output from said smoothing circuit are input, and which finds the amount of fluctuation between the smoothed second gain output from said smoothing circuit and the second gain output from said second gain decoding circuit,
90 outputs the smoothed second gain to said second gain circuit as is when the amount of fluctuation is less than a predetermined threshold value, replaces the smoothed second gain with a smoothed second gain limited in terms of values it is capable of taking on when the amount of fluctuation is equal to or greater

100 than the threshold value, and outputs this smoothed second gain to said second gain circuit.

42. The apparatus according to claim 41, further comprising:

(p) an excitation-signal normalizing circuit, to which an excitation vector in a subframe output from said adder is input, and which calculates gain and a shape vector from the excitation
5 vector every subframe or every sub-subframe obtained by subdividing a subframe, outputs the gain to said smoothing circuit, and outputs the shape vector to an excitation-signal reconstruction circuit; and

(q) an excitation-signal reconstruction circuit, to which the gain output from said smoothing-quantity limiting circuit and the shape vector output from said excitation-signal
10 normalizing circuit are input, and which calculates a smoothed excitation vector, and outputs this excitation vector to said memory circuit and to said synthesis filter;

(r) wherein said smoothing circuit has the output of said
15 excitation-signal normalizing circuit input thereto instead of the output of said second gain decoding circuit and has the output of said smoothing coefficient calculation circuit input thereto;

(s) said smoothing-quantity limiting circuit has the
20 smoothed gain output from said smoothing circuit applied to one input terminal thereof and has the gain output from said excitation-signal normalizing circuit, rather than the output

of said second gain decoding circuit, applied to the other input
terminal thereof, finds the amount of fluctuation between the
smoothed gain output from said smoothing circuit and the gain
output from said excitation-signal normalizing circuit,
supplies the smoothed gain as is to said excitation-signal
reconstruction circuit when the amount of fluctuation is less
than a predetermined threshold value, replaces the smoothed gain
with a smoothed gain limited in terms of values it is capable
of taking on when the amount of fluctuation is equal to or greater
than the threshold value, and supplies this smoothed gain to the
excitation-signal reconstruction circuit; and

(t) the output of said second gain decoding circuit is input
to said second gain circuit as second gain.

43. The apparatus according to claim 42, further comprising:
a power calculation circuit, to which the reconstructed
vector output from said synthesis filter is input, and which
calculates the sum of the squares of the reconstructed vector
and outputting the power to a voiced/unvoiced identification
circuit;

a speech mode decision circuit, to which a past excitation
vector held by said memory circuit and an index specifying a
delay output from said code input circuit are input, and which
calculates a pitch prediction gain in a subframe from the past
excitation vector and the delay, determines a predetermined
threshold value with respect to the pitch prediction gain or with

respect to an in-frame average value of the pitch prediction gain in a certain frame, and sets a speech mode;

15 a voiced/unvoiced identification circuit, to which an LSP output from said LSP decoding circuit, the speech mode output from said speech mode decision circuit and the power output from said power calculation circuit are input, and which finds the amount of fluctuation of a spectrum parameter, identifying a
20 voice segment and an unvoiced segment based upon the amount of fluctuation, and outputs amount-of-fluctuation information and an identification flag;

25 a noise classification circuit, to which the amount-of-fluctuation information and identification flag output from said voiced/unvoiced identification are input, and which classifies noise and outputting a classification flag; and

30 a first changeover circuit, to which the gain output from said excitation-signal normalizing circuit, the identification flag output from said voiced/unvoiced identification circuit and the classification flag output from the noise classification circuit are input, and which changes over a switch in accordance with a value of the identification flag and a value of the classification flag to thereby switchingly output the gain to any one of a plurality of filters having different filter
35 characteristics from one another;

wherein the filter selected from among said plurality of filters has the gain output from said first changeover circuit

applied thereto, smoothes the gain using a linear filter or non-linear filter and outputs the smoothed gain to said smoothing-quantity limiting circuit as a first smoothed gain; and

said smoothing-quantity limiting circuit has the first smoothed gain output from the selected filter applied to one input terminal thereof, has the output of said excitation-signal normalizing circuit applied to the other input terminal thereof, finds the amount of fluctuation between the gain output from said excitation-signal normalizing circuit and the first smoothed gain output from said selected filter, uses the first smoothed gain as is when the amount of fluctuation is less than a predetermined threshold value, replaces the first smoothed gain with a smoothed gain limited in terms of values it is capable of taking on when the amount of fluctuation is equal to or greater than the threshold value, and supplies this smoothed gain to said excitation-signal reconstruction circuit.

44. The apparatus according to claim 41, further comprising a changeover circuit switching between a mode of using of the gain and a mode of using the smoothed gain as the input to said second gain circuit in accordance with a switching control signal, which has entered from an input terminal, when the speech signal is decoded.

45. The apparatus according to claim 42, further comprising a changeover circuit to which the excitation vector output from


aid adder is input, and which outputs the excitation vector to
said synthesis filter or to said excitation-signal normalizing
5 circuit in accordance with a changeover control signal, that has
entered from an input terminal.

46. The apparatus according to claim 43, further comprising a
changeover circuit to which the excitation vector output from
aid adder is input, and which outputs the excitation vector to
said synthesis filter or to said excitation-signal normalizing
5 circuit in accordance with a changeover control signal, that has
entered from an input terminal.

ABSTRACT OF THE DISCLOSURE

The quality of reconstructed speech on which background noise is superimposed is improved in a speech signal decoding apparatus for generating a speech signal by driving a filter, which is constituted by linear prediction coefficients, by an excitation signal. A smoothing circuit smoothes sound source gain in a noise segment using sound source gain that was obtained in the past. A smoothing-quantity limiting circuit calculates an amount of fluctuation represented by dividing, by the sound source gain, the absolute value of the difference between the sound source gain and the sound source gain that has been smoothed, and limits the value of the smoothed gain in such a manner that the amount of fluctuation will not exceed a certain threshold value.

FIG. 1

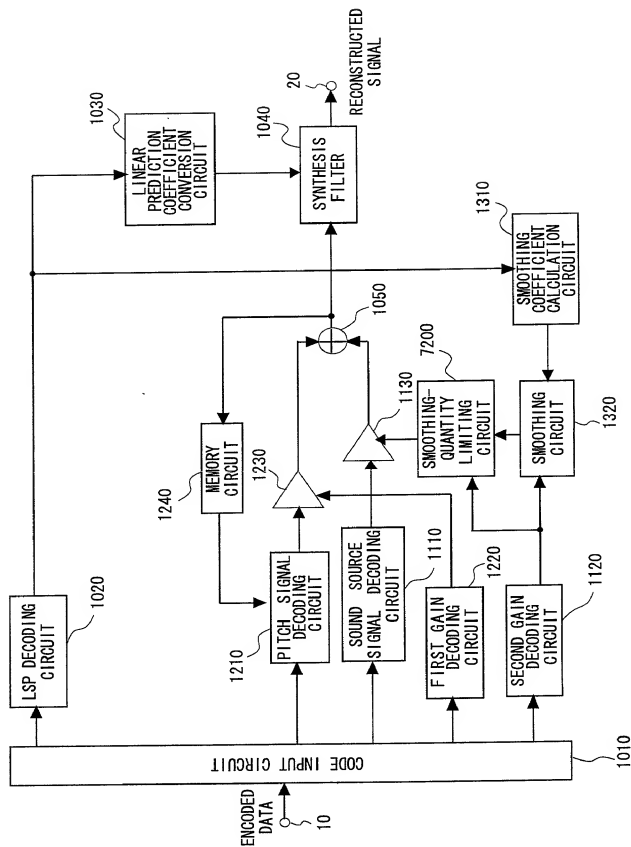

001201-54165960

FIG. 2

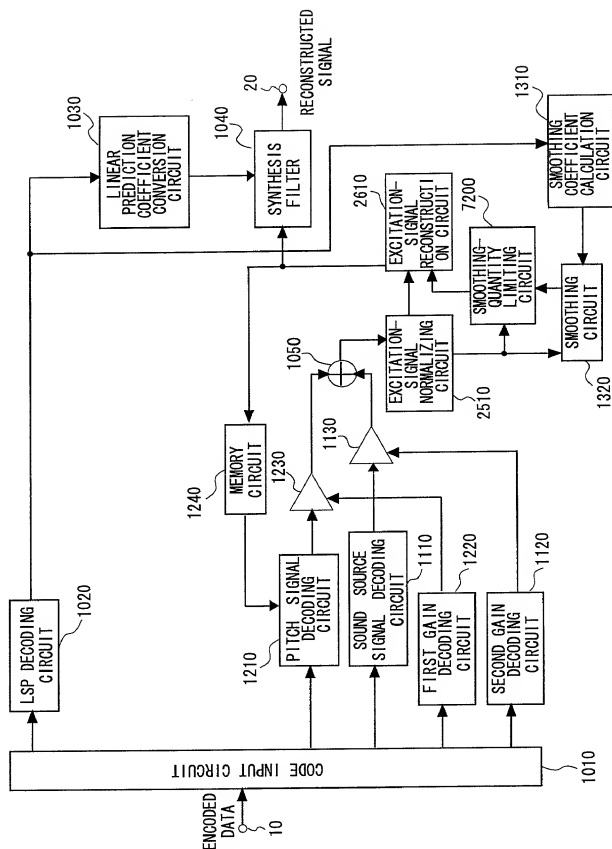


FIG. 3

000001-5466960

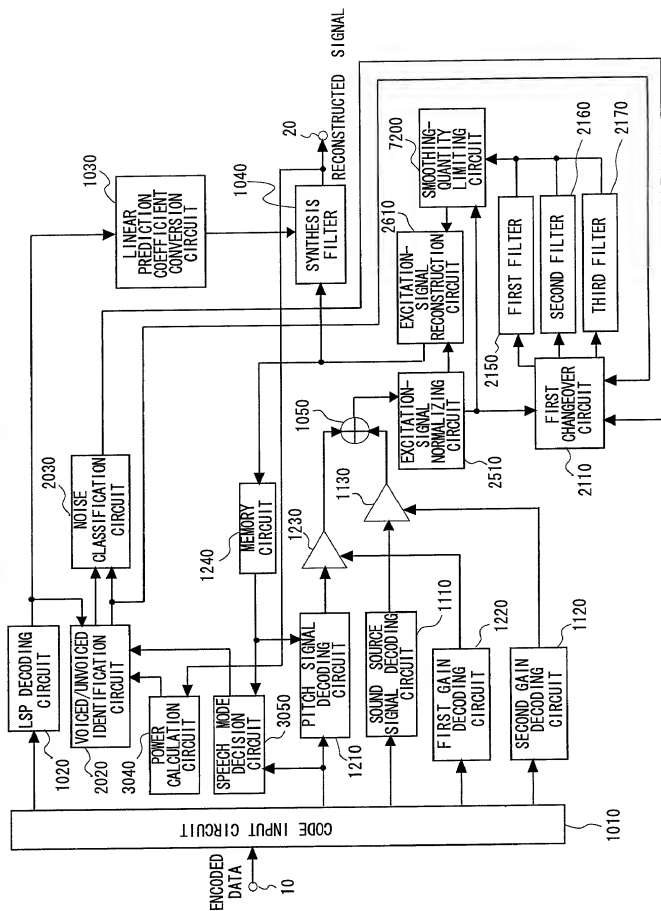


FIG. 4


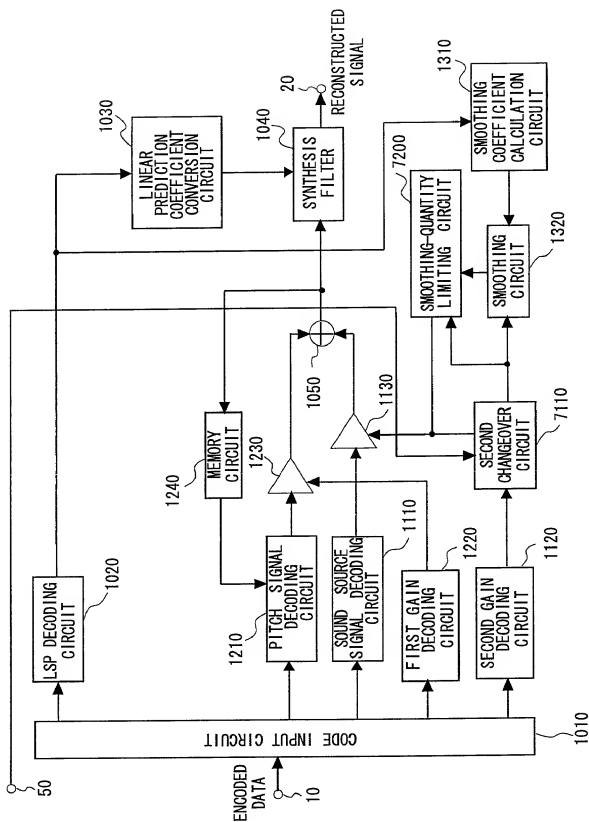


FIG. 6

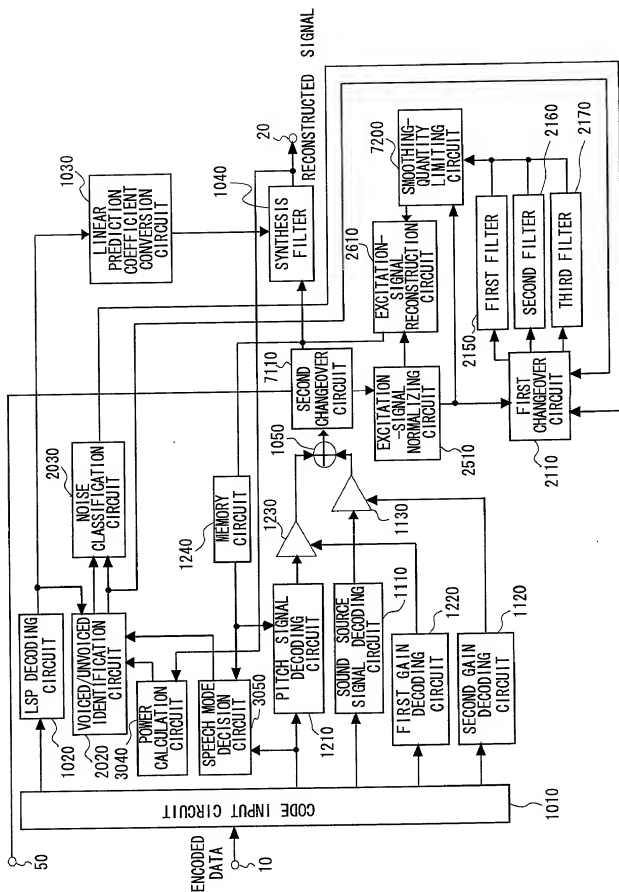

001001*5E+66960

FIG . 7

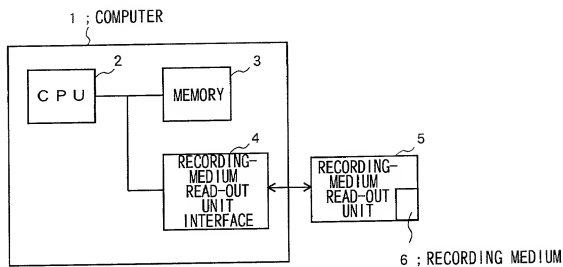


FIG. 8

PRIOR ART


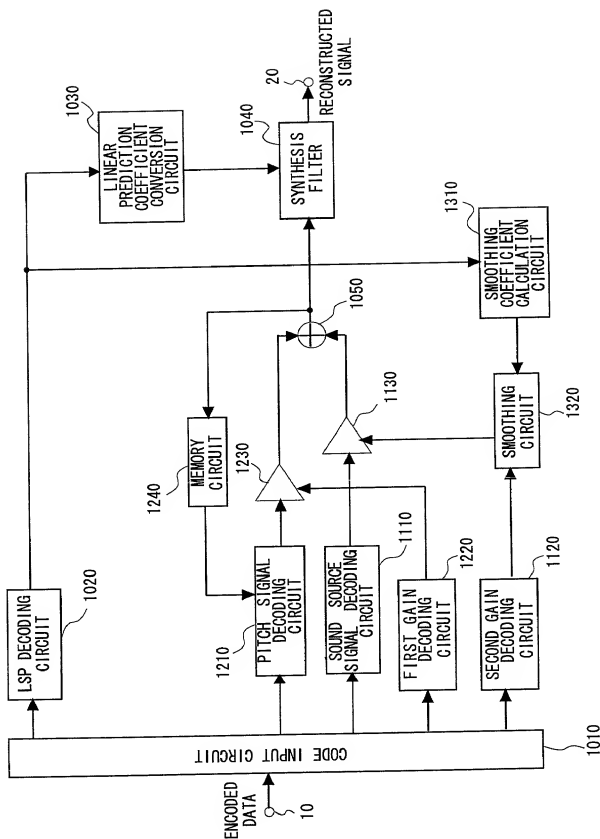


FIG. 9 PRIOR ART

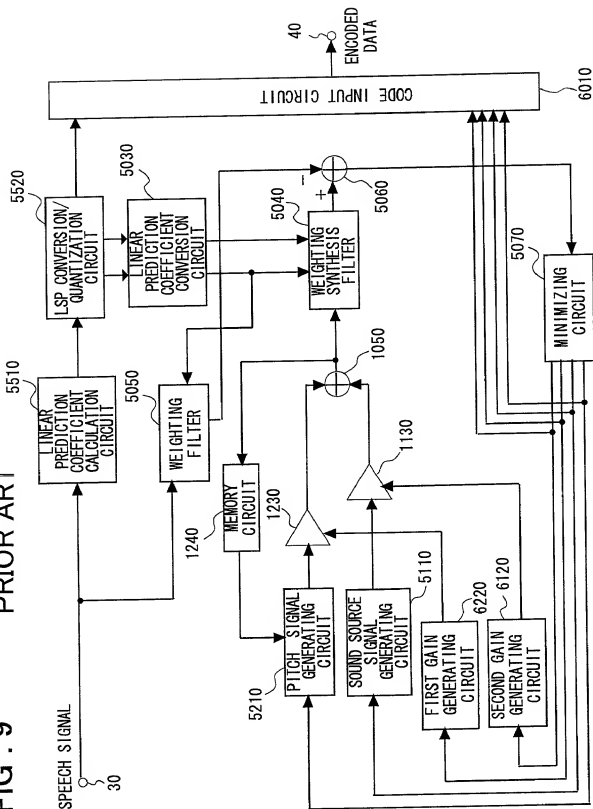

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

SPEECH SIGNAL DECODING METHOD AND APPARATUS, SPEECH SIGNAL
ENCODING/DECODING METHOD AND APPARATUS, AND PROGRAM PRODUCT THEREFOR

which application is:

☒ the attached application
(for original application)

☐ application Serial No. _____
filed _____, and amended on _____

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:


Application Number	Country	Filing Date	Priority Claimed (yes or no)
11-311620	Japan	November 1, 1999	yes

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon i. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kaspar, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778 and Abraham J. Rosner, Reg. No. 33,276, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to **SUGHRUE, MION, ZINN, MACPEAK & SEAS**, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date <u>Oct. 20, 2000</u>	First Inventor <u>Atsushi MURASHIMA</u>
Residence <u>Tokyo, Japan</u>	Signature <u>Atsushi</u> <u>Murashima</u> 
Citizenship <u>Japanese</u>	Post Office Address <u>c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan</u>